

POLITEK®

OTO TAMİR BOYALARI / CAR REFINISHINGS





OTO TAMİR BOYALARINDA YÜKSELEN DEĞER

**THE LEADER IN AFTERMARKET AND CAR
REFINISHING PRODUCTS**



www.icmpolitek.com.tr

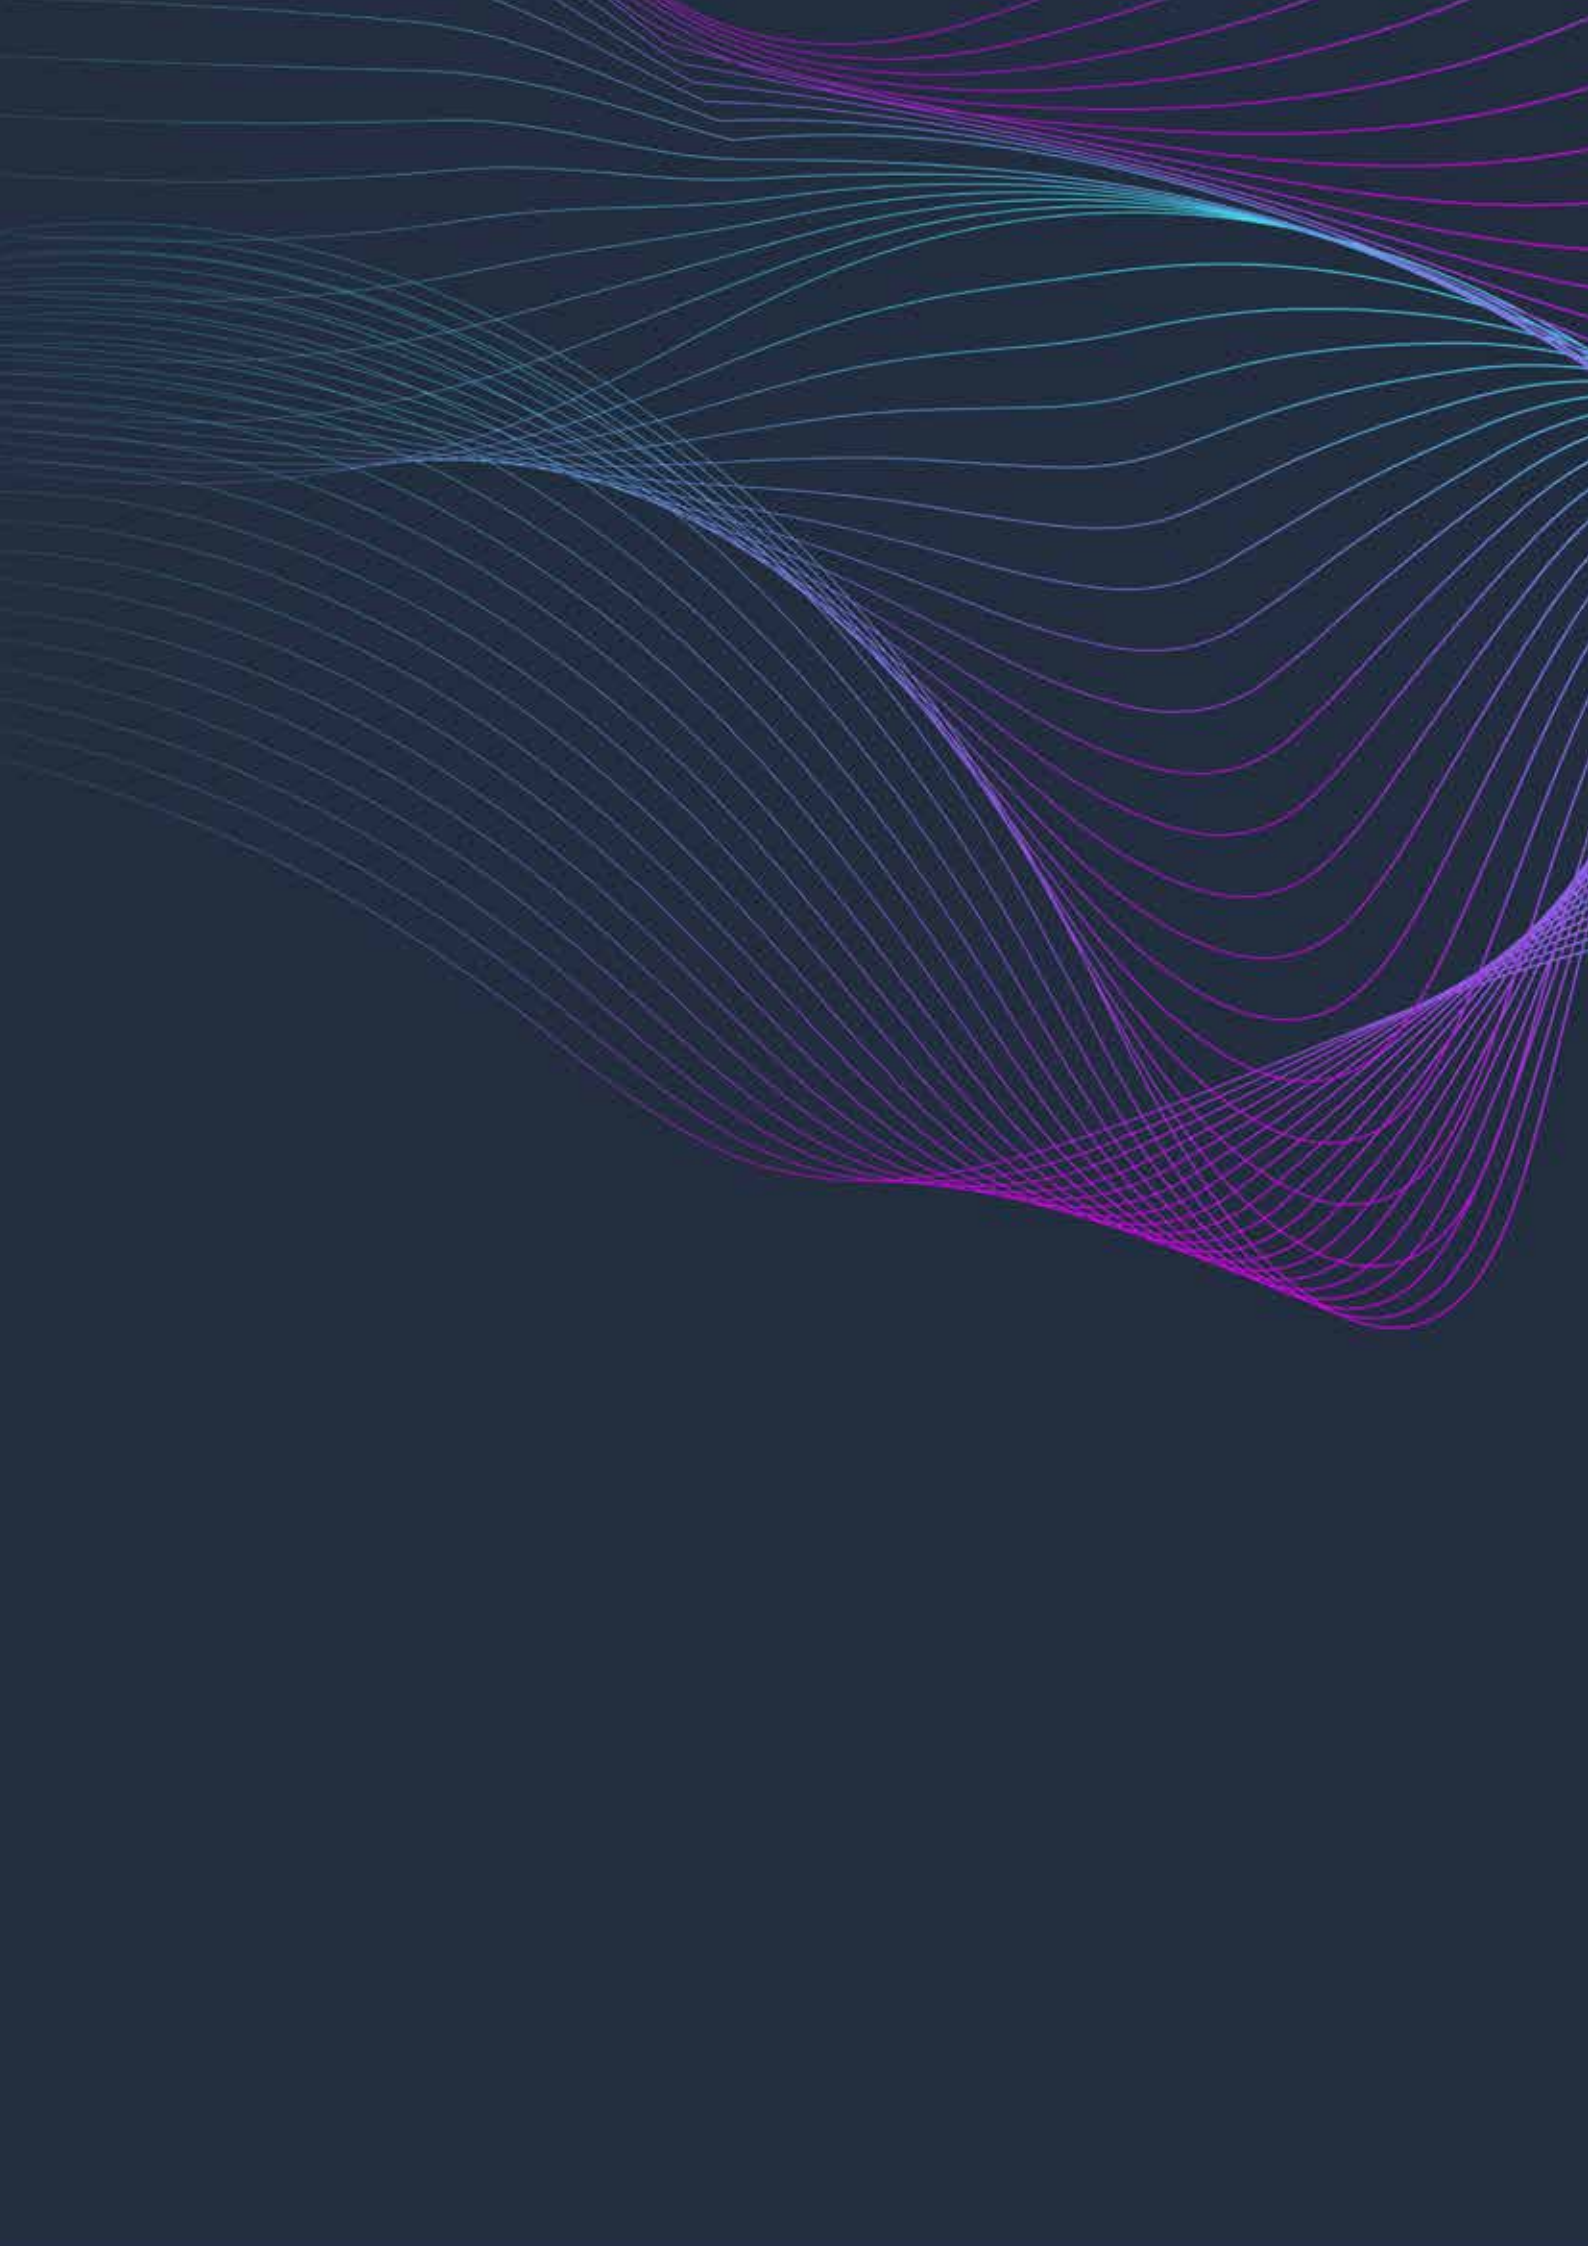

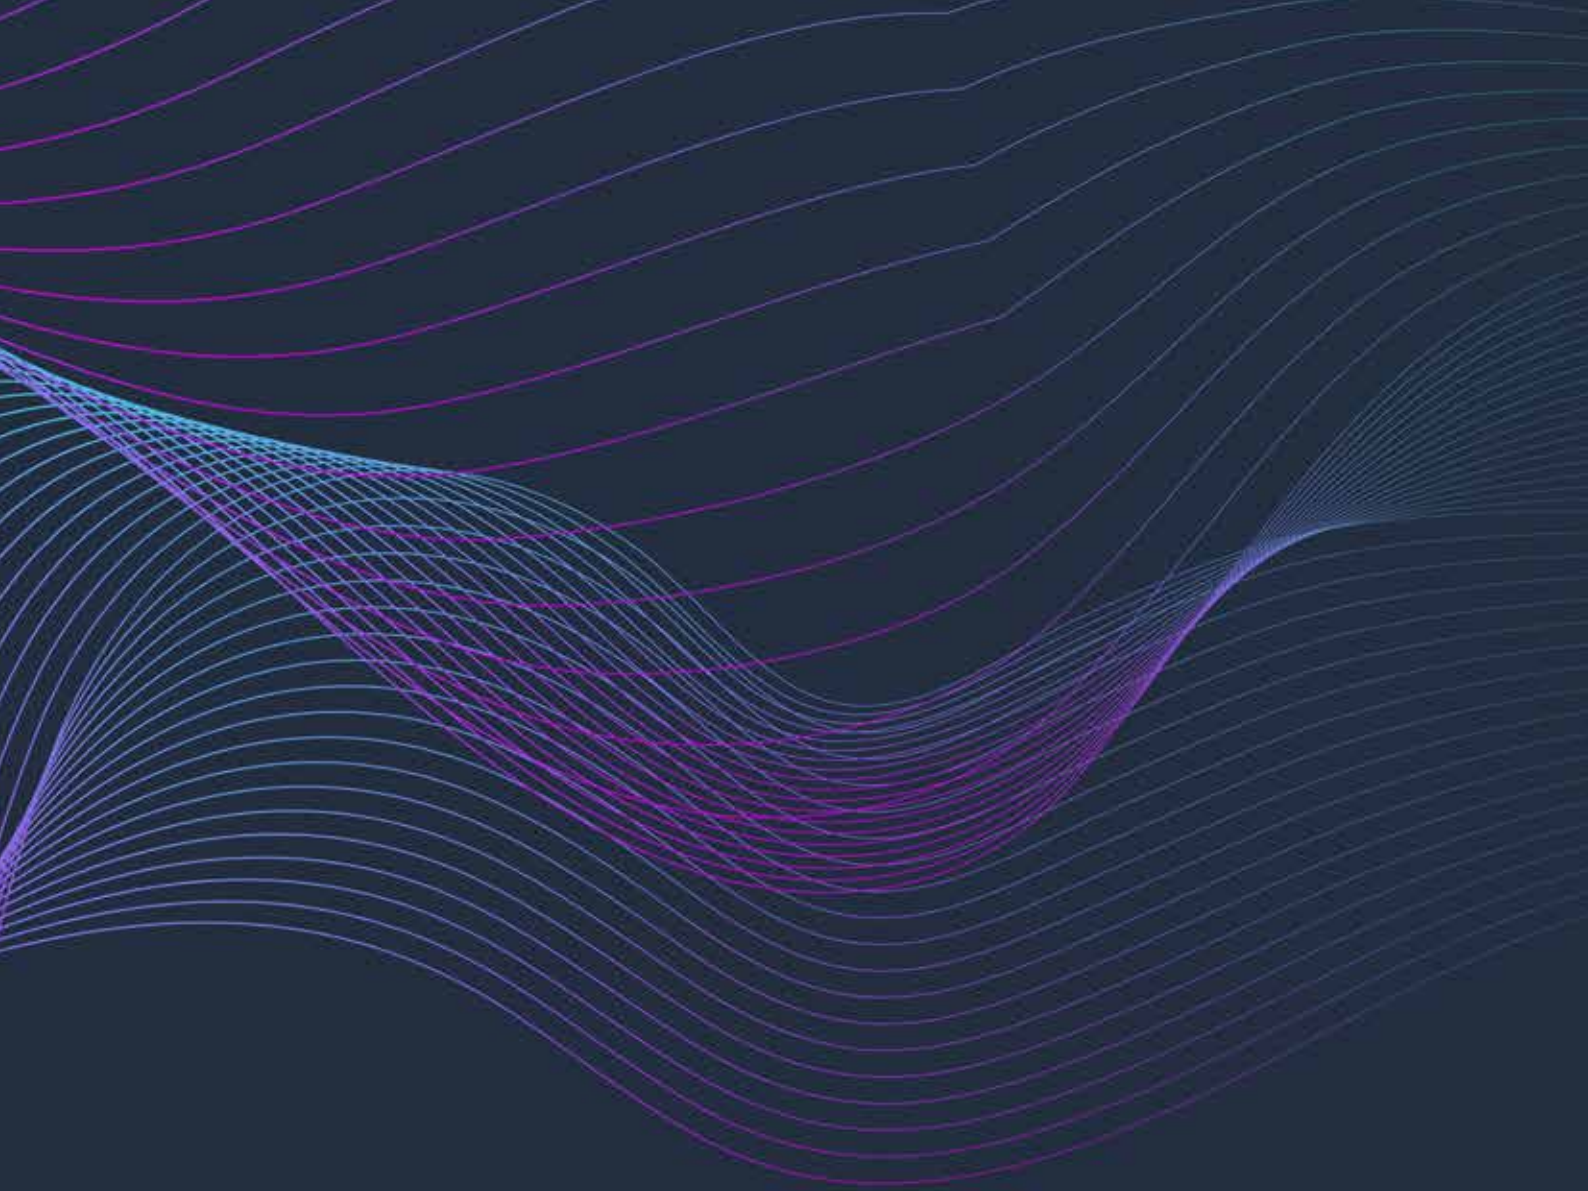

► HAKKIMIZDA About Us

About Us

2003 yılında faaliyete başlayan Polikim Kimya yeni ismi ile Politek Oto Boyaları Anonim Şirketimiz kurulduğu günden itibaren adım adım edindiği kurumsal tecrübe ve bilgi birikimini yenilikçi, dinamik, profesyonel iş anlayışı ile birleştirerek oto tamir boyaları sektöründe büyük hedeflere yürümektedir.

Türkiye'nin dört bölgesindeki bölge müdürlükleri ve fabrika eğitim merkezindeki uzman teknik ve satış personelleri vasıtası ile ayrıca yurt geneline yayılmış geniş bayi ağı yapısıyla her türlü pazar ihtiyaçlarına yönelik uygun çözümleri ivedilikle üretebilen esneklikte çalışmalarını sürdürmektedir.

Oto tamir boya grubu sektöründe pazar analizi-üretim-satış ve satış sonrası hizmetlerde başarılı çalışmalarını sürdüren şirketimiz sahip olduğu kalite belgeleri (ISO 9001:2015, ISO 14001:2015 , ISO 45001:2018 vb) doğrultusunda en kaliteli hammaddeler ve yüksek teknolojileri kullanarak Tuzla Organize Sanayi Bölgesi – İstanbul adresindeki merkez fabrikasında üretimini sürdürmektedir.

Ayrıca firmamız , aynı sektörde Bursa'da üretim yapan Orbay Kimya Ltd. Şirketinin oto tamir boya üretim faaliyetlerinin bütününde Ekim 2022 tarihinde bünyesine katıp üretim kapasitesini üç katına çıkartmış ve halen oto tamir boya sektöründe Türkiye'de üretim yapan en önemli ve en yüksek tonajlı firmalar içinde yerini almıştır.

Firmamızın ihracat departmanı dünya genelinde yaklaşık 52 ülkeye yapmış olduğu ihracatlarla uluslararası piyasadada başarısını gün geçtikçe artırıp Türk bayrağını dalgalandırmaktadır.

Ticari ürünlerin satışını gerçekleştiren ICM Boya A.Ş. , ICM Kimya A.Ş. ve Politek Oto Boyaları Sanayi ve Ticaret Anonim Şirketlerimiz ICM Grup çatısı altında toplanmış olub, şirketimizin büyümesi konusunda gösterdiğiniz sonsuz destek için teşekkürlerimizi sunarız.

Saygılarımızla

POLİTEK OTO BOYALARI SAN.TİC.A.Ş

Politek Oto Boyaları Anonim Şirketi, with its new name "Polikim Kimya", which started its activities in 2003, continues to march towards great goals in the auto refinishing paints sector by combining the corporate experience and knowledge it has gained step by step since its establishment with its innovative, dynamic and professional business approach.

It continues to work with the flexibility to produce appropriate solutions for all kinds of market needs immediately through its regional directorates in four regions of Türkiye and its expert technical and sales personnel in the factory training center, as well as its wide dealer network structure spread throughout the country.

Our company, which continues its successful works in market analysis-production-sales and after-sales services in the auto refinishing paint group sector, continues its production in its central factory in Tuzla Organized Industrial Zone - Istanbul by using the highest quality raw materials and high technologies in line with its quality certificates (ISO 9001: 2015, ISO 14001: 2015, ISO 45001: 2018 etc.).

In addition, our company has tripled its production capacity in October 2022 by incorporating all of the auto refinishing paint production activities of Orbay Kimya Ltd. Company, which operates in the same sector in Bursa and has taken its place among the most important and highest tonnage companies producing in the auto refinishing paint sector in Turkey.

The export department of our company is increasing its success in the international market day by day with its exports to approximately 52 countries around the world and waving its flag. ICM Boya A.Ş., ICM Kimya A.Ş. and Politek Oto Boyaları Sanayi ve Ticaret Anonim Şirketi, which sell commercial products, have been united under the structure of ICM Group and we would like to thank you for your endless support for the growth of our company.

Sincerely

POLİTEK OTO BOYALARI SAN.TİC.A.Ş

► VİZYONUMUZ OUR VISION

POLİTEK OTO BOYALARI SANAYİ VE TİCARET ANONİM ŞİRKETİ olarak markalarımız ile Oto tamir boyaları sektöründe, Türkiye ve ihracat yapılan tüm ülkelerde, Türk bayrağını dalgalandırmak ve güvenilir, çözüm odaklı lider üretici şirket olmak.

As POLITEK AUTOMOTIVE PAINTS INDUSTRY AND TRADE INC., our vision is to wave the Turkish flag in the automotive repair paints sector in both Turkey and all the countries we export to, and to become a reliable, solution-oriented leading manufacturer.

► MİSYONUMUZ OUR MISSION

Oto tamir boyaları sektöründe Pazar analizi -üretim-satış ve satış sonrası hizmetlerde tüketici-bayi ve üretici üçgeninde kazandır-kazan felsefesi ile doğru zamanda, doğru yerde, doğru ekip ile ayrıca bütün süreçlerde SIFIR hata ile güvenilir ürünü tüketici ile buluşturmak.

In the automotive repair paints sector, our mission is to bring the most reliable products to consumers by employing a win-win philosophy in market analysis, production, sales, and after-sales services within the consumer-dealer-manufacturer triangle, using the right team, at the right time, and in the right place, with ZERO error in all processes.

► MİSYONUMUZ OUR VALUES

POLİTEK OTO BOYALARI ailesi olarak değerlerimiz şunlardır;

- Dürüstlük ve Şeffaflık
- Birbirine Bağlılık ve Vefa
- Güvenilirlik-Çalışma Azmi ve İş Disiplini
- Kurumsal Tecrübe ve Bilgi Birikimi
- Çevreye ve İnsan Sağlığına Duyarlılık

As the POLITEK AUTOMOTIVE PAINTS family, our values are as follows:

- Honesty and Transparency
- Loyalty and Commitment to Each Other
- Reliability, Determination, and Work Discipline
- Corporate Experience and Knowledge
- Sensitivity to the Environment and Human Health

► Kalite Politikamız Our Quality Policy



Oto tamir kimyasalları imalat ve satışı alanında faaliyetlerine devam eden POLİTEK OTO BOYALARI SANAYİ VE TİCARET ANONİM ŞİRKETİ' nin tüm personeli ile Kalite, Çevre, İş Sağlığı ve Güvenliği yönetim sistemlerinin en iyi şekilde uygulayarak sıfır hata, tatmin olmuş müşteri, yeşil bir doğa, güvenli ve uyumlu çalışma ortamı sağlamaya odaklanmıştır.

Faaliyetlerimizi, müşteri memnuniyetini, çalışanlarımızın ve toplumun sağlık ve güvenlik şartlarını ve çevresel performansımızı sürekli olarak iyileştirerek yürütmek için politikamız;

- Müşterilerimizin ihtiyaçlarına en doğru çözümlerle, hızlı ve kaliteli ürünlerle hizmet vermek,
- Dünya piyasasında kalitemiz ile bir Türk firması olarak söz hakkı sahibi olmak,
- Ürünlerimizle ilgili oluşabilecek veya oluşan hatalarımız sonucundaki etkilerini azaltmak için, gerekli önlemleri almak ve sürekli geliştirme faaliyetlerini yerine getirmek,
- Çalışanları, yaptıkları işin önemi, şirket hedeflerine ulaşma ve müşteri gereksinimlerini karşılanması konusundaki katkıları, yaptıkları işler ile ilgili tehlikeler, çevre, iş güvenliği ile ilgili konular hakkında eğitmek ve katkıda bulunmalarını sağlamak,
- İlgili ulusal ve uluslararası Standartlar, Çevre Mevzuatı, İş Sağlığı ve Güvenliği Mevzuatlarını sağlamak ve uygunluğunu sürdürmek,
- Doğal Kaynakların tüketiminin azaltılması, kirliliğin kaynağında önlenmesi ve atık yönetimini sağlayarak çevreyi korumak,
- İş sağlığı güvenliği sisteminden kaynaklanan yaralanma, sağlık bozulmasını engellemek ve risklerin yönetimini sağlamak,
- Tüm çalışanların ve tedarikçilerimizin katılımı ile mükemmellik yolunda, dünya rekabetine uyumlu olarak ilerlemek, Temel prensipleri üzerine kurulu olan ISO 9001, ISO 14001, ISO 45001 standartları doğrultusunda politikamızın uygulanacağını ve sürekli geliştirileceğini taahhüt ederiz.

POLITEK AUTOMOTIVE PAINTS INDUSTRY AND TRADE INC., which continues its activities in the manufacturing and sales of automotive repair chemicals, is focused on ensuring zero errors, satisfied customers, a green environment, and a safe and harmonious working environment by applying the best practices of Quality, Environmental, and Occupational Health and Safety management systems with all its personnel.

Our policy, aimed at continuously improving our activities, customer satisfaction, the health and safety conditions of our employees and society, and our environmental performance, is as follows:

- To serve our customers with the most accurate solutions, fast and high-quality products to meet their needs,
 - To make our mark in the global market as a Turkish company known for its quality,
 - To take necessary precautions and conduct continuous improvement activities to minimize or prevent the effects of any possible or existing errors related to our products,
 - To train employees on the importance of their work, their contribution to achieving company goals, fulfilling customer requirements, and on the hazards related to their jobs, as well as on environmental and occupational safety issues, and to encourage their participation,
 - To comply with relevant national and international Standards, Environmental Legislation, and Occupational Health and Safety Legislation, and to maintain conformity,
 - To protect the environment by reducing natural resource consumption, preventing pollution at its source, and managing waste,
 - To prevent injuries and health deterioration arising from the occupational health and safety system and to manage risks effectively,
 - To progress towards excellence with the participation of all our employees and suppliers, in alignment with global competition.
- We commit to implementing and continuously improving our policy in accordance with the principles of ISO 9001, ISO 14001, and ISO 45001 standards.

içerik

contents

01	Macun Grubu Putty Group	7- 21
02	Boya grubu Paint Group	22- 26
03	Vernik Grubu Clearcoat Group	27 - 32
04	Sertleştirici Grubu Hardener Group	33 - 37
05	Astar Grubu Filler Group	38 - 46
06	Tiner Grubu Thinner Group	47 - 53
07	Yardımcı Ürün Grubu Auxiliary Product Group	54 - 61
08	Bakım Grubu Maintenance Group	62 - 70
09	Aksesuar Grubu Accessory Group	71 - 76

POLITEK®

Politek Oto Boyaları San.ve Tic. A.Ş



POLITEK®

OTO TAMİR BOYALARI / CAR REFINISHINGS

ORBYLUX®

OTO TAMİR BOYALARI / CAR REFINISHINGS
www.orbylux.com.tr

MEGAMIX®

OTO TAMİR BOYALARI / CAR REFINISHINGS

autolac®

COLORTEC®

ENDÜSTRİYEL BOYALAR / INDUSTRIAL PAINTS

POLYCAR® ExtraCut®

POLYCAR®

BAKIM GRUBU / CARE GROUP

POLYCAR® PowerPolish®

NAVIGA
CERTIFICATION
ISO 9001:2015

NAVIGA
CERTIFICATION
ISO 14001:2015

NAVIGA
CERTIFICATION
ISO 45001:2018

01

► macun grubu putty group



polyester

POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

www.icmpolitek.com.tr

► POLYESTER Macun Putty

PP 210



Polyester Macun Putty



► Polyester Macun

Ürün Açıklaması:

İki bileşenli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan ve kolay zımparalanabilen polyester esaslı bir macundur. Yüksek yapışma özelliği olup, dolgu ve yoklama amaçlı kullanılır. Çekme ve çatlama yapmaz.

Kullanım Şekli:

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 30-35 dakika içerisinde zımparaya hazır hale gelir. Oto kaporta, DKP sac, CTP, galvanizli sac – kür olmuş eski boyalı yüzeyler ve ahşap üzerinde güvenle kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Polyester Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous and easy-to-sand polyester-based putty. It has high adhesion and is used for filling and polishing purposes. No shrinkage and cracking.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-35 minutes. It can be safely used on auto cowl, DKP sheet, GRP, galvanized sheet - cured old painted surfaces and wood. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
500 g	18 Pcs	135 Boxes
1000 g	12 Pcs	84 Boxes
2000 g	8 Pcs	81 Boxes
3000 g	6 Pcs	84 Boxes
4000 g	4 Pcs	81 Boxes
10000 g	1 Pcs	120 Boxes
Color : Yellow, Gray		HS Code: 3214.10.90.00.00



01

► POLYESTER Macun Putty

Polyester Galvaniz ve Alüminyum Macun Aluminium - Galvanize Putty



PP 220

► Polyester Galvaniz ve Alüminyum Macun

Ürün Açıklaması:

İki bileşenli, galvaniz ve alüminyum yüzeyler için özel tasarlanmış, yüksek dolgulu, çekimi kolay, esnek, gözenek bırakmayan ve kolay zımparalanabilen polyester macun. Tüm metal yüzeylerde yüksek yapışma özelliği olup, çekme ve çatlama yapmaz. Dolgu amaçlı kullanılır.

Kullanım Şekli:

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C' de 5-8 dakika içerisinde kullanılmalıdır. 25-30 dakika içerisinde zımparalanmaya hazır hale gelir. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Aluminium - Galvanize Putty

Product Description:

Two-component, high-filled, easy-to-shrink, flexible, non-porous and easy-to-sand polyester putty specially designed for galvanized and aluminum surfaces. It has high adhesion on all metal surfaces and does not shrink and crack. It is used for filling purposes.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 25-30 minutes. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
1800 g	8 Pcs	81 Boxes
3000 g	6 Pcs	84 Boxes
Color : Gray		HS Code: 3214.10.90.00.00



▷ POLYESTER Macun Putty

PP 230



Special Soft Polyester Macun Polyester Putty



▷ Special Soft Polyester Macun

Ürün Açıklaması:

İki bileşenli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan ve çok kolay zımparalanabilen Polyester esaslı yumuşak bir dolgu macunudur.

Kullanım Şekli:

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 30-40 dakika içerisinde zımparaya hazır hale gelir. Oto kaporta, DKP sac, CTP, galvanizli sac – kür olmuş eski boyalı yüzeyler ve ahşap üzerinde güvenle kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

▷ Polyester Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous, polyester-based soft putty that can be sanded very easily.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-40 minutes. It can be safely used on auto cowling, DKP sheet, GRP, galvanized sheet - cured old painted surfaces and wood. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	84 Boxes
2000 g	8 Pcs	81 Boxes
Color : White, Yellow		HS Code: 3214.10.90.00.00



01

► POLYESTER Macun Putty

Supersoft Polyester Macun Polyester Putty



PP 237

► Supersoft Polyester Macun

Ürün Açıklaması

İki bileşenli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan ve çok kolay zımparalanabilen Polyester esaslı yumuşak bir dolgu macunudur.

Kullanım Şekli

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 30-40 dakika içerisinde zımparaya hazır hale gelir. Oto kaporta, DKP sac, CTP, galvanizli sac – kür olmuş eski boyalı yüzeyler ve ahşap üzerinde güvenle kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Polyester Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous, polyester-based soft putty that can be sanded very easily.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-40 minutes. It can be safely used on auto cowling, DKP sheet, GRP, galvanized sheet - cured old painted surfaces and wood. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
500 g	18 Pcs	135 Boxes
1000 g	12 Pcs	84 Boxes
2000 g	8 Pcs	81 Boxes
3000 g	6 Pcs	84 Boxes
4000 g	4 Pcs	81 Boxes

Color : Yellow

HS Code: 3214.10.90.00.00



Clean-Degrease

Mixing Ratio
(100:2-3)Pot Life: 5-8
min (20 °C)Drying: 30-40
min (20 °C)

Infrared: 8 min



Sanding: 1. P80-P180 2. P180-P280



See data sheet

Use Masking
Equipment

Avoid sunlight

▷ POLYESTER Macun Putty

PP 240



Polyester Fiber Macun Glass Fiber Putty



▷ Polyester Fiber Macun

Ürün Açıklaması

İki bileşenli, dolgu gücü yüksek, çekimi kolay ve kolay zımparalanabilen elyaf (fiberglass) içerikli, polyester esaslı bir macundur. Yüksek yapışma özelliği olup, ağır hasar, çukur ve delikleri onarmak için geliştirilmiş özel amaçlı dolgu özellikli bir üründür.

Kullanım Şekli

% 2-3 oranında BPO sertleştiricisi ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 35-40 dakika içerisinde zımparaya hazır hale gelir. Sac, galvanizli sac, alüminyum, CTP, SMC, FRP ve boyalı yüzeylerde kullanılır.

Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

▷ Glass Fiber Putty

Product Description:

It is a two-component, polyester-based putty containing fiberglass, which has high filling power, easy to shrink and easy to sand. It has high adhesion and is a special purpose filling product developed to repair heavy damage, pits and holes.

Product Usage:

When mixed homogeneously with 2-3% BPO hardener, it should be used within 5-8 minutes at 20°C. It is ready for sanding in 35-40 minutes. It is used on sheet metal, galvanized sheet, aluminum, GRP, SMC, FRP and painted surfaces.

Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
500 g	18 Pcs	135 Boxes
1000 g	12 Pcs	84 Boxes
1800 g	8 Pcs	81 Boxes
2700 g	6 Pcs	84 Boxes

Color : Gray HS Code: 3214.10.90.00.00



01

► POLYESTER Macun Putty

Polyester Mikro Fiber Macun Mikro Glass Fiber Putty



PP 250

► Polyester Mikro Fiber Macun

Ürün Açıklaması

Cam elyaf takviyeli macundur. Özel polyester reçine içeriğinden dolayı esnek yapıdadır. Kısa cam elyaf takviyelerinden dolayı normal fiberden daha elastiktir. Yumuşak ve kolay zımparalanabilirliği sayesinde geniş alanlara uygulamada kullanımı kolaydır. Yüksek yapışma gücüne sahiptir.

Kullanım Şekli

% 2-3 oranında BPO sertleştiricisi ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 35-40 dakika içerisinde zımparaya hazır hale gelir. Sac, galvanizli sac, alüminyum, CTP, SMC, FRP ve boyalı yüzeylerde kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Mikro Glass Fiber Putty

Product Description:

It is a glass fiber reinforced putty. It is flexible due to its special polyester resin content. It is more elastic than normal fiber due to short glass fiber reinforcements. Soft and easy sandability makes it easy to use for application over large areas. It has high adhesion strength.

Product Usage:

When mixed homogeneously with 2-3% BPO hardener, it should be used within 5-8 minutes at 20°C. It is ready for sanding in 35-40 minutes. It is used on sheet metal, galvanized sheet, aluminum, GRP, SMC, FRP and painted surfaces.

Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
500 g	18 Pcs	135 Boxes
1000 g	12 Pcs	84 Boxes
1800 g	8 Pcs	81 Boxes
Color : Gray,Green		HS Code: 3214.10.90.00.00



▷ POLYESTER Macun Putty

PP 260



Plastik Yüzey Macunu Plastic Surface Putty



▷ Plastik Yüzey Macunu

Ürün Açıklaması

İki bileşenli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan ve kolay zımparalanabilen polyester esaslı esnek bir plastik yüzey dolgu macunudur.

Otomotiv endüstrisinde kullanılan bütün plastik yüzeylerde (PP/EPDM, PUR, PVC vb.) ayrıca CTP, sac-polyester veya eski boyalı yüzeyler üzerinde de kullanılabilir.

Kullanım Şekli

% 2-3 oranında BPO sertleştiricisi ile homojen bir şekilde karıştırıldığında 20°C'de 4-8 dakika içerisinde kullanılmalıdır. 35-40 dakika içerisinde zımparaya hazır hale gelir. Sac, galvanizli sac, alüminyum, CTP, SMC, FRP ve boyalı yüzeylerde kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

▷ Plastic Surface Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous and easy-to-sand polyester-based flexible plastic surface putty. It can be used on all plastic surfaces used in the automotive industry (PP/EPDM, PUR, PVC etc.) as well as on GRP, sheet-polyester or old painted surfaces.

Product Usage:

When mixed homogeneously with 2-3% BPO hardener, it should be used within 4-8 minutes at 20°C. It is ready for sanding in 35-40 minutes. It is used on sheet metal, galvanized sheet, aluminum, GRP, SMC, FRP and painted surfaces. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers

Gross Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	84 Boxes
Color : Black		HS Code: 3214.10.90.00.00



01

► POLYESTER Macun Putty

Karbon Fiber Macun Carbon Fiber Putty



PP320

► Karbon Fiber Macun

Ürün Açıklaması

İki bileşenli, karbon fiber takviyeli özel tasarlanmış, çok yüksek dolgulu, çekimi kolay, esnek, gözenek bırakmayan ve kolay zımparalanabilen polyester macun. Aderans kalitesi yüksek ve büyük yüzeylere, çentikler, delikli/ zarar görmüş yüzeyler ve diğer özel yüzeylere uygulanabilir. Dolgu amaçlı kullanılır.

Kullanım Şekli

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C' de 4-6 dakika içerisinde kullanılmalıdır. 30-45 dakika içerisinde zımparalanmaya hazır hale gelir. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Carbon Fiber Putty

Product Description:

It is a two-component, carbon fiber reinforced, specially designed, very high-filled, easy-to-shrink, flexible, non-porous and easy-to-sand polyester putty. It has high adherence quality and can be applied to large surfaces, notches, perforated/ damaged surfaces and other special surfaces. It is used for filling purposes.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 4-6 minutes at 20°C. It is ready for sanding in 35-40 minutes. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
500 g	18 Pcs	135 Boxes
1000 g	12 Pcs	84 Boxes
1800 g	8 Pcs	81 Boxes

Color : Black HS Code: 3214.10.90.00.00



Clean-Degrease

Mixing Ratio
(100:2:3)Pot Life: 4-6
min (20 °C)Drying: 30-45
min (20 °C)Infrared: 5-8
min

Sanding: 1. P80-P180 2. P180-P280



See data sheet

Use Masking
Equipment

Avoid sunlight

▷ POLYESTER Macun Putty

PP 270



Hafif Polyester Macun

Light Weight Polyester Putty



▷ Hafif Polyester Macun

Ürün Açıklaması

İki bileşenli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan, çok kolay zımparalanabilen ve çok yumuşak polyester esaslı bir dolgu-yoklama macunudur.

Yoğunluğunun düşük olması nedeniyle oto tamir boya grubunun haricinde diğer sanayi dallarında (inşaat, marin, ulaşım sektörlerinde) CTP, DKP sac, galvaniz yüzeyler, alüminyum ve ahşap yüzeylerde güvenle kullanılabilir.

Kullanım Şekli

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 30-35 dakika içerisinde zımparalanmaya hazır hale gelir. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

▷ Light Weight Polyester Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous, very easily sandable and very soft polyester-based putty. Due to its low density, it can be used safely on GRP, DKP sheet metal, galvanized surfaces, aluminum and wood surfaces in other industrial branches (construction, marine, transportation sectors) except for the auto refinishing paint group.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-35 minutes. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
1 Lt	8 Pcs	81 Boxes
1,5 Lt	6 Pcs	84 Boxes
3,785 Lt	4 Pcs	63 Boxes
Color : Gray		HS Code: 3214.10.90.00.00



01

► POLYESTER Macun Putty

Fiber Hafif Polyester Macun

Fiber Light Weight Bodyfiller



PP 533

► Fiber Hafif Polyester Macun

Ürün Açıklaması

İki bileşenli, cam elyaf takviyeli, yüksek dolgulu, çekimi kolay, gözenek bırakmayan, çok kolay zımparalanabilen ve çok yumuşak polyester esaslı bir dolgu-yoklama macunudur. Yoğunluğunun düşük olması nedeniyle oto tamir boya grubunun haricinde diğer sanayi dallarında (inşaat, marin, ulaşım sektörlerinde) CTP, DKP sac, galvaniz yüzeyler, alüminyum ve ahşap yüzeylerde güvenle kullanılabilir.

Kullanım Şekli

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kullanılmalıdır. 30-40 dakika içerisinde zımparalanmaya hazır hale gelir. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Fiber Light Weight Bodyfiller


Product Description:

It is a two-component, glass-fiber reinforced, high-filled, easy-to-shrink, non-porous, very easily sandable and very soft polyester-based putty. Due to its low density, it can be used safely on GRP, DKP sheet metal, galvanized surfaces, aluminum and wood surfaces in other industrial branches (construction, marine, transportation sectors) except for the auto refinishing paint group.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-40 minutes. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
1 Lt	8 Pcs	81 Boxes
1,5 Lt	6 Pcs	84 Boxes
Color : Green		HS Code: 3214.10.90.00.00

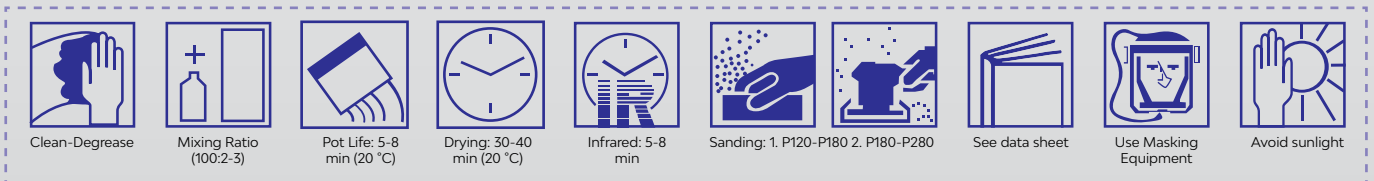

► POLYESTER Macun Putty

PP 290



1K Yoklama Macunu 1K Spot Repair Putty



► 1K Yoklama Macunu

Ürün Açıklaması

1K Yoklama Macunu, özellikle oto tamir ve mobilya sektörü için tasarlanmıştır. Astar veya boya uygulamadan önce araç yüzeyindeki küçük hataları tamir etmek amacı ile uygulanır. Ayrıca ahşap boyamalarında bölgesel tamir işlemlerinde de kullanılabilir.

Kullanım Şekli

Uygulama yapılacak yüzey iyice temizlenmelidir. Ürün tek komponentlidir. Ayrıca sertleştirici kullanımına gerek yoktur. 10-15 dakika içerisinde kurur. Kuruma süresi film kalınlığına ve ortam sıcaklığına bağlı olarak değişkenlik gösterir. Eski boyalı yüzeyler, 1K ve 2K astarlı yüzeylere uygundur. Doğrudan sac üzerine uygulanması tavsiye edilmez.

► 1K Spot Repair Putty


Product Description:

1K Spot Repair Putty is specially designed for the auto repair and furniture industry. It is applied to repair minor defects on the vehicle surface before applying primer or paint. It can also be used for localized repairs in wood staining.

Product Usage:

The application surface should be thoroughly cleaned. The product is single component. There is also no need to use hardener. It dries in 10-15 minutes. Drying time varies depending on film thickness and ambient temperature. It is suitable for old painted surfaces, 1K and 2K primed surfaces. It is not recommended to apply directly on sheet metal.

Gross Filling	Pcs per Box	Boxes per Pallet
200 gr Tube	12 Pcs	200 Boxes
500 g Gross	18 Pcs	135 Boxes
Color : Red		HS Code: 3214.10.90.00.00

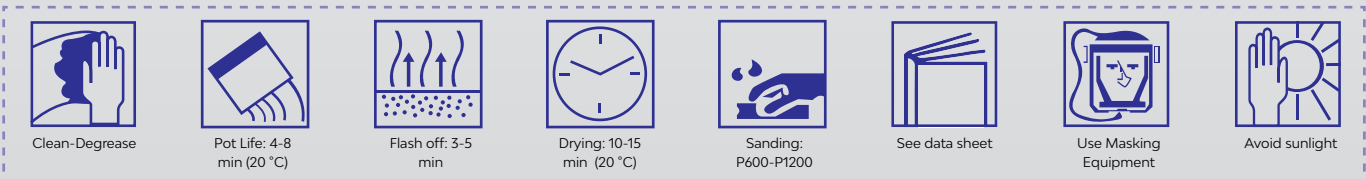

01

► POLYESTER Macun Putty

Polyester Silver Macun Polyester Silver Putty



► Polyester Silver Macun

Ürün Açıklaması

Esnek polyester reçine esaslı, özel alüminyum metal pigment içeren doldurma gücü yüksek, tiksotropik yapıda çok kolay çekim özelliği olan, yumuşak ve çok rahat zımparalanabilme özelliklerine sahip, zımpara sonrası yüzeyde delik bırakmayan bir macundur. Politek silver, taşıtlarda alüminyum efekti ve lehim gereken yerlerde, radyatör üzerindeki küçük çatlak ve boşlukların doldurulmasında ve silindir blokları üzerindeki küçük çatlakların tamirinde kullanılabilir.

Kullanım Şekli

% 2-3 oranında BPO sertleştiricisi ile homojen bir şekilde karıştırıldığında 20°'de 5-8 dakika kullanılmalıdır. 30-35 dakika içerisinde zımparaya hazır hale gelir hazır hale gelir. Oto kaporta, DKP sac, CTP, galvanizli sac ve ahşap yüzeyler üzerinde güvenle kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Polyester Silver Putty

Product Description:

It is a flexible polyester resin based putty containing special aluminum metal pigment, with high filling power, thixotropic structure, very easy to shrink, soft and very easy to sand, does not leave holes on the surface after sanding. Politek silver can be used in vehicles where aluminum effect and soldering is required, filling small cracks and gaps on radiators and repairing small cracks on cylinder blocks.

Product Usage:

When mixed homogeneously with 2-3% BPO hardener, it should be used for 5-8 minutes at 20°. It is ready for sanding in 30-35 minutes. It can be used safely on auto cowlings, DKP sheet, GRP, galvanized sheet and wooden surfaces. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	84 Boxes
1800 g	8 Pcs	81 Boxes
Color : Silver		HS Code: 3214.10.90.00.00



► POLYESTER Macun Putty

PP300



İzolu Polyester Macun Polyester Isophytal Putty



► İzolu Polyester Macun

Ürün Açıklaması

İki bileşenli, 180°C'ye kadar tek kademede istenirse ara ısıtma verilerek 230°C kadar yüksek ısı gerektiren prosesler için özel tasarlanmış, yüksek dolgulu, çekimi rahat, kolay zımparalanır izofitalik esaslı polyester macun. Yüksek ısılarda çekme veya çatlama yapmaz. Yüksek yapışma özelliği olup dolgu amaçlı kullanılır.

Kullanım Şekli

% 2-3 oranında BPO sertleştiricisi ile homojen bir şekilde karıştırıldığında 20°C'de 5-8 dakika içerisinde kurur, 35-40 dakikada zımparaya hazır hale gelir. 230°C'ye kadar yüksek ısı gerektiren tüm metal yüzeylerde kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Polyester Isophytal Putty


Product Description:

It is a two-component, high-filled, easy-to-sand, easy-to-sand isophytal polyester putty, specially designed for processes requiring high temperatures up to 230°C with intermediate heating up to 180°C in a single stage. No shrinkage or cracking at high temperatures. It has high adhesion and is used for filling purposes.

Product Usage:

When mixed homogeneously with 2-3% BPO hardener, it dries in 5-8 minutes at 20°C and is ready for sanding in 35-40 minutes. It can be used on all metal surfaces requiring high temperatures up to 230°C. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.


Gross Filling	Pcs per Box	Boxes per Pallet
2000 g	8 Pcs	81 Boxes
Color : Gray		HS Code: 3214.10.90.00.00

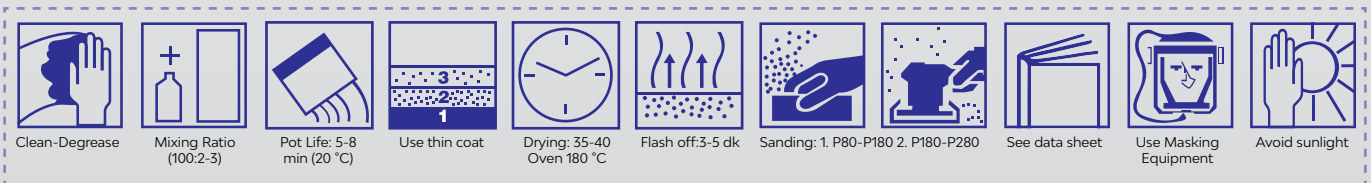

01

► POLYESTER Macun Putty

Polyester Macun Polyester Putty 3 in 1

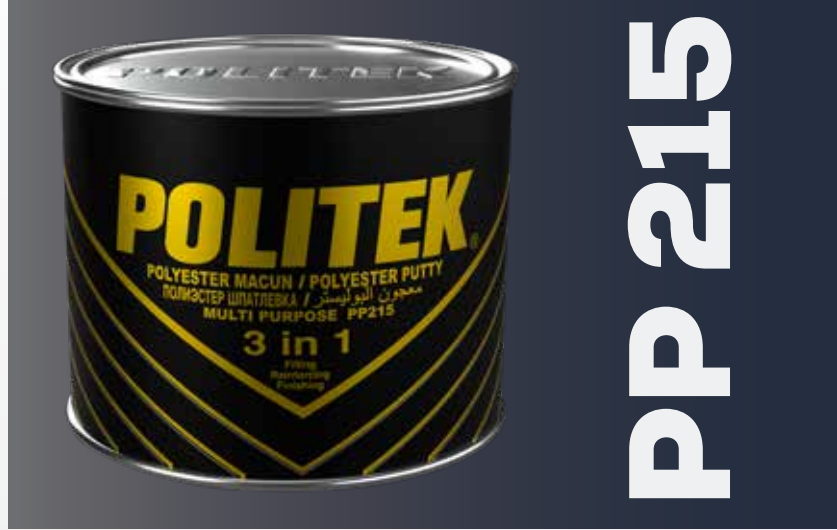

PP 215

► Polyester Macun

Ürün Açıklaması

Mükemmel esneklikte olan bu ürün, astar uygulamasından önce küçük veya daha büyük düzensizlikleri ve boşlukları doldurmak için tasarlanmıştır. Politek Polyester Macun 3'ü 1 arada, takviye, dolgu ve finishing sağlar. En uygun miktarda cam elyafı içerir ve özel granülasyon formülü sayesinde dolgu ve ideal finishing işlemlerini garanti eder. Mükemmel sonuç verir.

Kullanım Şekli

% 2-3 oranında Polyester macun sertleştiricisi (BPO) ile homojen bir şekilde karıştırıldığında 20°C'de 4-8 dakika içerisinde kullanılmalıdır. 30-35 dakika içerisinde zımparaya hazır hale gelir. Oto kaporta, DKP sac, FRP / GRP / CTP, galvanizli sac – kür olmuş eski boyalı yüzeyler ve ahşap üzerinde güvenle kullanılır. Termoplastik akrilik yüzeyler (TPA) ve 1K sac astarları üzerinde kullanılması tavsiye edilmez.

► Polyester Putty

Product Description:

It is a two-component, high-filled, easy-to-shrink, non-porous and easy-to-sand polyester-based putty. It has high adhesion and is used for filling and polishing purposes. No shrinkage and cracking.

Product Usage:

When mixed homogeneously with 2-3% Polyester paste hardener (BPO), it should be used within 5-8 minutes at 20°C. It is ready for sanding in 30-35 minutes. It can be safely used on auto cowling, DKP sheet, GRP, galvanized sheet - cured old painted surfaces and wood. Not recommended for use on thermoplastic acrylic substrates (TPA) and 1K Etching Primers.

Gross Filling	Pcs per Box	Boxes per Pallet
900 g	12 Pcs	84 Boxes
1800 g	8 Pcs	81 Boxes
2500 g	6 Pcs	84 Boxes
Color : Mint Green		HS Code: 3214.10.90.00.00



Clean-Degrease

Mixing Ratio
(100:2-3)Pot Life: 4-8
min (20 °C)Drying: 30-35
min (20 °C)

Infrared: 5-8min



Sanding: 1. P80-P180 2. P180-P280



See data sheet

Use Masking
Equipment

Avoid sunlight

02

► boya grubu paint group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

Acryclear® 2K Akrilik Oto Boyası Acrylic Auto Paint



P1110

► Acryclear® 2K Akrilik Oto Boyası

Ürün Açıklaması

Yüksek dış dayanım tercih eden sektörler (otomotiv ve ticari araçlar, mobilya, metal-inşaat sanayi) için üretilmiştir. Akrilik reçine içeren ve poliizosiyoat reçineli sertleştiricisi ile kimyasal kurumasını yapan yüksek fiziksel ve kimyasal dirence sahip örtücülüğü yüksek, parlak iki bileşenli düz renk boyadır.

Kullanım Şekli

100 kısım Acrypaint® 2K Akrilik Boya, 50 kısım Acryhard® 2K Universal Akrilik Sertleştirici ve 20-25 kısım Acrythin® 2K Universal Akrilik Tiner ile homojen bir şekilde karıştırılarak 5-35°C arasındaki sıcaklıklarda uygulanabilir.

► Acryclear® 2K Acrylic Auto Paint

Product Description:

It is produced for sectors that prefer high external strength (automotive and commercial vehicles, furniture, metal-construction industry). It is a glossy two-component solid color paint with high physical and chemical resistance, high coverage, high glossy two-component solid color paint containing acrylic resin and chemical drying with polyisocyanate resin hardener.

Product Usage:

100 parts of Acrypaint® 2K Acrylic Paint, 50 parts of Acryhard® 2K Universal Acrylic Hardener and 20-25 parts of Acrythin® 2K Universal Acrylic Thinner can be mixed homogeneously and applied at temperatures between 5-35°C.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
3,785 Lt (1 US Gallon)	4 Pcs	63 Boxes
15 Kg	1 Pcs	36 Buckets
18 Kg	1 Pcs	36 Buckets
Color : White (0001), Deep Black (9005)		HS Code: 3208.20.90.00.11

Mixing Ratio (100:50:20-25)	DIN CUP4/20°C 16-17 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.3-4 bar	Spraying coat: 2-3 single coat	Flash off: 5-10 min	Drying: 12 hours (20°C) 30 min (60°C)	See data sheet	Use Masking Equipment

► BOYA GRUBU Paint Group

P2210



ColorTEC® Selülozik Boya Cellulosic Paint



► ColorTEC® Selülozik Boya

Ürün Açıklaması

Ahşap ve metal yüzeylerde kullanılabilen, çabuk kuruyan, hava kurumalı parlak ve kapaticılığı yüksek nitroselüloz esaslı bir son kat boyadır. Değişik sanayi dallarında bütün metal ve ahşap yüzeylerde başarı ile uygulanabilir ve parlaklığını uzun süre muhafaza eder.

Kullanım Şekli

Kutu iyice karıştırıldıktan sonra 100 kısım ColorTEC® Selülozik Boyaya, 30-40 kısım ColorTEC® Selülozik Tiner ilave edilerek 2 kat pistole uygulaması yapılır. Tek kat uygulamada 30-35 mikron kuru film kalınlığı verir. 1 litre ile 9-10 m² alan boyanabilir. 20°C ortam sıcaklığında toz kuruması 5-10 dk. dokunma kuruması 20-30 dk, montaj 2-3 saat'dir. İstenirse 24 saat sonra boya üzerine pasta-polish işlemi yapılabilir.

► ColorTEC® Cellulosic Paint

Product Description:

It is a fast drying, air drying, high glossy and high coating nitrocellulose based topcoat paint that can be used on wood and metal surfaces. It can be successfully applied on all metal and wood surfaces in various industrial branches and keeps its glossy feature for a long time.

Kullanım Şekli

After mixing the paint can thoroughly, add 30-40 parts of ColorTEC® Cellulosic Thinner to 100 parts of ColorTEC® Cellulosic Paint and apply 2 coats of spray paint. It gives 30-35 micron dry film thickness in single coat application. 9-10 m² area can be painted with 1 liter. At 20°C ambient temperature, powder drying time is 5-10 minutes, touch drying time is 20-30 minutes, installation time is 2-3 hours. If desired, paste-polish can be applied on the paint after 24 hours.

Net Filling	Pcs per Box	Boxes per Pallet
0,75 Lt	12 Pcs	75 Boxes
2,5 Kg	4 Pcs	72 Boxes
12 Kg	1 Pcs	36 Buckets

Color : Black, White, Matt Black, Brilliant Aluminium

HS Code: 3208.20.90.00.11

									
Mixing Ratio (100:30-40)	DIN CUP4/20°C 16-17 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.5-4 bar	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Drying: 2-3 hours (20°C)	Polishing	See data sheet	Use Masking Equipment

ColorTEC® Endüstriyel Son Kat Boya Industrial Top Coat Paint



► ColorTEC® Endüstriyel Son Kat Boya

Ürün Açıklaması

Ahşap ve metal yüzeylere kullanılabilen, çabuk kuruyan hava kurumalı, parlak ve kapaticılığı yüksek styrene alkit esaslı sentetik bir son kat boyadır. Değişik sanayi dallarında bütün metal ve ahşap yüzeylerde başarı ile uygulanabilir ve parlaklığını uzun süre muhafaza eder. Ziraat aletleri, traktörler, çelik eşya ve el aletleri ayrıca elektrik motorları, su pompaları, askeri donanımlarda dahil olmak üzere bütün sanayi üretimlerinde püskürtme, rulo-fırça veya daldırma yöntemleri kullanılarak temiz ve kuru yüzeylere astarlı veya astarsız olarak başarı ile uygulanabilir.

Kullanım Şekli

Kutu içine karıştırıldıktan sonra 100 kısım ColorTEC® Endüstriyel Son Kat Boyaya 20-25 kısım ColorTEC® Endüstriyel Tiner ilave edilerek 2 kat pistole uygulaması yapılır. Tek kat uygulamada 35-40 mikron kuru film kalınlığı verir. 1 litre ile 11-13 m² alan boyanabilir. 20 °C ortam sıcaklığında toz kuruması 5-10 dk, dokunma kuruması 20-30 dk, montaj 1-2 saat'dir.



P3210

► ColorTEC® Industrial Top Coat Paint



Product Description:

It is a styrene alkyd based synthetic topcoat paint that can be used on wood and metal surfaces, dries quickly, has high gloss and high coverage. It can be successfully applied on all metal and wood surfaces in various industrial branches and keeps its glossy feature for a long time. It can be successfully applied to clean and dry surfaces with or without primer using spraying, roller-brush or dipping methods in all industrial productions including agricultural tools, tractors, steel goods and hand tools, electric motors, water pumps, military equipment.

Product Usage:

After mixing the primer thoroughly, add 20-25 parts of ColorTEC® Industrial Thinner to 100 parts of ColorTEC® Industrial Top Coat Paint and apply 2 coats of airbrush. It gives 35-40 micron dry film thickness in single coat application. 11-13 m² area can be painted with 1 liter. At 20°C ambient temperature, powder drying time is 5-10 minutes, touch drying time is 20-30 minutes, installation time is 1-2 hours.

Net Filling	Pcs per Box	Boxes per Pallet
0,75 Lt	12 Pcs	75 Boxes
2,5 Kg	4 Pcs	72 Boxes
15 Kg	1 Pcs	36 Buckets
Color : 42 Colors		HS Code: 3208.20.90.00.11

								
Mixing Ratio (100:20-25)	DIN CUP4/20°C 17-18 sec	Gun nozzle: 1.4-1.8 mm	Working pressure: 3-4 bar	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Drying: 1-2 hours (20°C)	See data sheet	Use Masking Equipment

▷ BOYA GRUBU Paint Group

P6314



ColorTEC® Isıya Dayanıklı Boya Heat Resistant Paint



▷ ColorTEC® Isıya Dayanıklı Boya

Ürün Açıklaması

Silikon reçine esaslı, hava kurumalı, yüksek örtme gücüne ve kaliteye sahip bir boyadır. Soba, baca, egzoz boruları ve her türlü metal yüzeyde kullanılabilir. İçerisinde bulunan özel reçine ve pigmentler sayesinde 500 °C - 700 °C sıcaklığa kadar dayanıklıdır.

Kullanım Şekli

100 birim ColorTEC® Silikon Esaslı Yüksek Isıya Dayanıklı Boya, 50 birim ColorTEC® Silikon Esaslı Yüksek Isıya Dayanıklı Boya Tineri ile homojen bir şekilde karıştırılır. 5-35 °C arasındaki sıcaklıklarda uygulanabilir.

▷ ColorTEC® Heat Resistant Paint


Product Description:

It is a silicone resin based, air drying paint with high covering power and quality. It can be used on stoves, chimneys, exhaust pipes and all kinds of metal surfaces. It is resistant to temperatures up to 500 °C - 700 °C thanks to the special resin and pigments it contains.

Product Usage:

Mix 100 parts ColorTEC® Silicone Based High Temperature Resistant Paint with 50 parts ColorTEC® Silicone Based High Temperature Resistant Paint Thinner homogeneously. It can be applied at temperatures between 5-35 °C.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	6 Pcs	75 Boxes
18 Kg	1 Pcs	36 Boxes
Color : Metallic Black ,Metallic Gray		HS Code: 3208.20.10.00.11

 Mixing Ratio (100:50)	 DIN CUP4/20°C 12-14 sec	 Gun nozzle: 1.3-1.6 mm	 Working pressure: 3.3-4 bar	 Spraying coat: 2 coat	 Flash off: 5-10 min	 Drying: 3-4 hours (20°C)	 See data sheet	 Use Masking Equipment
---	---	--	---	---	---	---	---	---

03

► vernik grubu clearcoat group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

www.icmpolitek.com.tr

► VERNİK GRUBU Clearcoat Group

C2121



Acryclear® 2K Akrilik Vernik Acrylic Clearcoat



► Acryclear® 2K Akrilik Vernik

Ürün Açıklaması

İki bileşenli fiziksel ve kimyasal dayanımı oldukça yüksek, çizilmeye ve güneşin soldurucu UV ışınlarına karşı korumalı, yüksek ve kalıcı parlaklık özelliklerine sahip özel tasarlanmış geniş kullanım özellikli akrilik esaslı verniktir.

Kullanım Şekli

100 ml'de 50 ml. (2:1) ACRYHARD® UV 2K Universal Akrilik Sertleştirici ile birlikte kullanılır. İsteğe göre 10-20 ml. ACRYTHIN® 2K Universal Akrilik Tiner ile inceltir. Tam kuruma 20°C'de 12 saat, 60°C'de 30 dakikadadır. Tüm baz katlar (metalik, sedef, üzeri vernikli düz renk) üzerine uygulanabilir.

► Acryclear® 2K Fiber Putty

Product Description:

It is a two-component acrylic-based clearcoat with high physical and chemical resistance, scratch and fading UV rays of the sun, specially designed with high and permanent gloss properties.

Product Usage:

It is used per ratio of 50 ml ACRYHARD® and UV 2K Universal Acrylic Hardener in 100 ml (2:1). It can be thinned with 10-20 ml of ACRYTHIN 2K Universal Acrylic Thinner. It dries completely at 20°C in 16 hours, at 60°C in 30 minutes. It can be applied on all base coats (metallic, pearlescent, clearcoated solid color).

Net Filling	Pcs per Box	Boxes per Pallet
0,5 Lt	12 Pcs	120 Boxes
1 Lt	12 Pcs	80 Boxes
2,50 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes
15 Lt	1 Pcs	36 Buckets
HS Code: 3210.0010.00.12		

Mixing Ratio (100:50:10-20)	DIN CUP4/20°C 15-16 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.0-3.7 bar	Spraying coat: 2-3 single coat	Flash off: 5-10 min	Drying: 12 hours (20°C) 30 min (60°C)	See data sheet	Use Masking Equipment

Acryclear HS® 2K Akrilik Vernik Acrylic Clearcoat



C2141

► Acryclear HS® Akrilik Vernik

Ürün Açıklaması

İki bileşenli, fiziksel ve kimyasal dayanımı oldukça yüksek, çizilmeye ve güneşin soldurucu UV ışınlarına karşı korumalı, kalıcı parlaklık özelliklerine sahip, dolgu gücü yüksek, özel olarak tasarlanmış akrilik esaslı bir verniktir. Ucucu organik solvent (VOC) oranı çok düşük olup uygulandığı yüzeyde yüksek film kalınlığı bırakır.

Kullanım Şekli

100 ml.'de 50 ml. (2:1) ACRYHARD HS® UV 2K Universal Akrilik Sertleştirici ile birlikte kullanılır. Tam kuruma 20°C'de 12 saat, 60°C'de 30 dakikadadır. Tüm baz katlar (metalik, sedef, üzeri vernikli düz renk) üzerine uygulanabilir.

► Acryclear HS® Acrylic Clearcoat

Product Description:

It is a two-component, specially designed acrylic-based clearcoat with high physical and chemical resistance, protection against scratches and fading UV rays of the sun, permanent gloss properties, high filling power. It has very low volatile organic solvent (VOC) content and leaves a high film thickness on the applied surface.

Product Usage:

It is used per ratio of 50 ml ACRYHARD HS® and UV 2K Universal Acrylic Hardener in 100 ml (2:1). It dries completely at 20°C in 16 hours, at 60°C in 30 minutes. It can be applied on all base coats (metallic, pearlescent, clearcoated solid color).

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
5 Lt	4 Pcs	54 Boxes
HS Code: 3210.0010.00.12		

Mixing Ratio (100:50:0-5)	DIN CUP4/20°C 16-18 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.0-3.7 bar	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Drying: 16 hours (20°C) 30 min. (60°C)	See data sheet	Use Masking Equipment

► VERNİK GRUBU Clearcoat Group

C2122



Megamix® 2K Akrilik Vernik Acrylic Clearcoat



► Megamix® 2K Akrilik Vernik

Ürün Açıklaması

İki bileşenli, fiziksel ve kimyasal dayanımı oldukça yüksek, çizilmeye ve UV ışınlarına karşı korumalı, yüksek kalıcı parlaklık özelliklerine sahip özel tasarlanmış akrilik esaslı ekonomik verniktir.

Kullanım Şekli

100 ml'de 50 ml (2:1) MEGAMIX® 2K Universal Akrilik Sertleştirici ile birlikte kullanılır, isteğe göre 10-20 ml ACYTHIN® 2K Universal Akrilik Tiner ile inceltir. Tam kuruma 20°C 'de 12 saat, 60°C 'de ise 30 dakikadır. Tüm baz katlar (metalik, sedef, üzeri vernikli düz renk) üzerine uygulanabilir.

► Megamix® 2K Acrylic Clearcoat

Product Description:

It is a two-component, specially designed acrylic-based economical clearcoat with high physical and chemical resistance, scratch and UV protection and high permanent gloss properties.

Product Usage:

It is used with 50 ml (2:1) MEGAMIX® 2K Universal Acrylic Hardener per 100 ml, optionally thinned with 10-20 ml ACYTHIN® 2K Universal Acrylic Thinner. Full drying is 12 hours at 20°C and 30 minutes at 60°C. It can be applied on all base coats (metallic, pearlescent, clearcoated solid color).

Net Filling	Pcs per Box	Boxes per Pallet
0,5 Lt	12 Pcs	120 Boxes
1 Lt	12 Pcs	80 Boxes
2,50 Lt	6 Pcs	72 Boxes

HS Code: 3210.0010.00.12

Mixing Ratio (100:50:10-20)	DIN CUP4/20°C 15-16 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.0-3.7 bar	Spraying coat: 2-3 single coat	Flash off: 5-10 min	Drying: 16 hours (20°C) 30 min (60°C)	See data sheet	Use Masking Equipment

Megamix® Akrilik Vernik HS Acrylic Clearcoat



▶ Megamix® Akrilik Vernik HS

Ürün Açıklaması

İki bileşenli, fiziksel ve kimyasal dayanımı oldukça yüksek, çizilmeye ve güneşin soldurucu UV ışınlarına karşı korumalı, kalıcı parlaklık özelliklerine sahip, dolgu gücü yüksek, özel olarak tasarlanmış akrilik esaslı bir verniktir. Ucucu organik solvent (VOC) oranı çok düşük olup uygulandığı yüzeyde yüksek film kalınlığı bırakır.

Kullanım Şekli

100 ml'de 50 ml. (2:1) MEGAMIX® HS UV 2K Universal Akrilik Sertleştirici ile birlikte kullanılır. Tam kuruma 20°C'de 12 saat, 60°C'de 30 dakikadadır. Tüm baz katlar (metalik, sedef, üzeri vernikli düz renk) üzerine uygulanabilir.

▶ Megamix® Acrylic Clearcoat HS

Product Description:

It is a two-component, specially designed acrylic-based clearcoat with high physical and chemical resistance, protection against scratches and fading UV rays of the sun, permanent gloss properties, high filling power. It has a very low volatile organic solvent (VOC) rate and leaves a high film thickness on the applied surface.

Product Usage:

It is used per ratio of 50 ml MEGAMIX® HS UV 2K Universal Acrylic Hardener in 100 ml (2:1). It dries completely at 20°C in 16 hours, at 60°C in 30 minutes. It can be applied on all base coats (metallic, pearlescent, clearcoated solid color).

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
HS Code: 3210.0010.00.12		

Mixing Ratio (100:50:0-5)	DIN CUP4/20°C 16-18 sec	Gun nozzle: 1.3-1.6 mm	Working pressure: 3.0-3.7 bar	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Drying: 16 hours (20°C) 30 min (60°C)	See data sheet	Use Masking Equipment

► VERNİK GRUBU Clearcoat Group

C1212 0404



Politek® Clear Vernik Clear Varnish



► Politek® Clear Vernik

Ürün Açıklaması

Otomotiv-plastik ve metal sanayisinde kullanılabilen üstün dolgu özellikli yüksek kapatma ve parlatma kabiliyetli, nitro-selüloz esaslı hava kurumalı bir dolgu verniğidir. Oyuncak sanayisinde, plastik yüzeyler üzerinde, aydınlatma armatürlerinde (pirinç, bronz vb) , vitray ve cam kaplama işlemlerinde ayrıca otomotiv ve mobilya sanayisinde tek komponentli vernik uygulamalarında güvenle kullanılabilir. Renksiz ve şeffaf olması nedeniyle uygulandığı yüzeylerin renginin değiştirmez. İçerdiği melamin alkit reçinesi sayesinde 80°C fırın ısılarına dayanıklı olup kesinlikle sararmaz ve çatlamaz.

Kullanım Şekli

100 kısım Politek® Clear Vernik, 100 kısım Politek® Selülozik Tiner ile inceltilerek 2 tek kat olarak önerildiği şekilde hazırlanmış yüzeye uygulanır. Bir diğer kullanım şeklide; 100 kısım ColorTec® Selülozik Boyaya 50 kısım Politek® Clear vernik ilavesi yapılarak uygulanabilir.

► Politek® Clear Varnish

Product Description:

It is a nitro-cellulose based air-drying filler clearcoat with superior filling properties, high coverage and polishing ability, which can be used in automotive-plastic and metal industries.

It can be safely used in the toy industry, on plastic surfaces, lighting fixtures (brass, bronze, etc.), stained glass and glass coating processes, as well as in single component clearcoat applications in the automotive and furniture industry. Since it is colorless and transparent, it does not change the color of the applied surfaces. Thanks to the melamine alkyd resin it contains, it is resistant to 80°C oven temperatures and will never turn yellow or crack.

Product Usage:

100 parts of Politek® Clear Varnish is diluted with 100 parts of Politek® Cellulosic Thinner and applied to the prepared surface in 2 single coats as recommended. Another way of use is to add 50 parts of Politek® Clear Varnish to 100 parts of ColorTec® Cellulosic Paint.

Net Filling	Pcs per Box	Boxes per Pallet
0,9 Lt	6 Pcs	120 Boxes
HS Code: 3210.0010.00.12		

 Mixing Ratio (100:100)	 Mixing Ratio (100:50)	 DIN CUP4/20°C 15-16 sec	 Gun nozzle: 1.5-1.5 mm	 Working pressure: 3-4 bar	 Spraying coat: 1-2 single coat	 Flash off: 5-10 min	 Drying: 20-30 min (20°C)	 Polishing	 See data sheet	 Use Masking Equipment
--	---	---	--	--	--	---	---	--	---	---

04

▷ sertleştirici grubu hardener group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

► SERTLEŐTİRİCİ GRUBU hardener group

H1110



Acryhard® UV 2K Universal Akrilik Sertleştirici

Universal Acrylic Hardener



► Acryhard® UV 2K Universal Akrilik Sertleştirici

Ürün Açıklaması


2K Akrilik Astar, vernik ve son katlar için geliştirilmiş çok amaçlı izosiyanat esaslı sertleştiricidir.

Kullanım Kılavuzlarında belirtilen oranlarda kullanılmalıdır. Yavaş, Standart ve Hızlı Acryhard® UV 2K Universal Akrilik Sertleştirici, uygulama ortam sıcaklığına ve tamir edilecek yüzeyin büyüklüğüne göre belirlenmelidir.

► Acryhard® UV 2K Universal Acrylic Hardener


Product Description:

2K Acrylic Hardener is a multi-purpose isocyanate based hardener developed for clearcoats and topcoats. It should be used at the rates specified in the User Manuals. Slow, Standart and Fast 2K Universal Acrylic Hardener should be preferred according to the current weather conditions and the size of the surface.

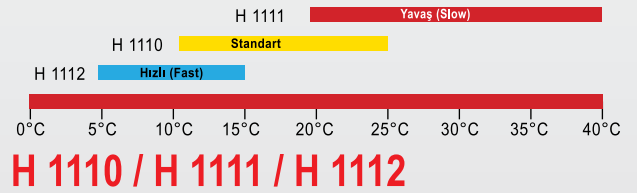

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	150 Boxes
0,5 Lt	12 Pcs	120 Boxes
1 Lt	12 Pcs	80 Boxes
2,5 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes

Type: Fast, Standart, Slow HS Code: 3210.00.10.00.12



Mixing Ratio
(100:50:10-25)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

04

► SERTLEŐTİRİCİ GRUBU hardener group

Acryhard HS® UV 2K Universal Akrilik Sertleőtirici Universal Acrylic Hardener



H1140

► Acryhard HS® UV 2K Universal Akrilik Sertleőtirici


Ürün Açıklaması

2K HS Vernik, boya ve astarların kimyasal olarak kurutulması için geliştirilmiş izosiyanat esaslı bir sertleőtiricidir. Kullanım Kılavuzlarında belirtilen oranlarda kullanılmalıdır. Yavaş, Standart ve Hızlı 2K HS Universal Akrilik Sertleőtiricisi, uygulama ortam sıcaklığına ve tamir edilecek yüzeyin büyüklüğüne göre belirlenmelidir. Ucucu organik solvent (VOC) oranı çok düşük olup uygulandığı yüzeyde yüksek film kalınlığı bırakır.

► Acryhard HS® UV 2K Universal Acrylic Hardener


Product Description:

2K HS is an isocyanate based hardener developed for the chemical drying of clearcoats, paints and primers. Slow, Standard and Fast 2K HS Universal Acrylic Hardener should be preferred according to the application ambient temperature and the size of the surface to be repaired. It has a very low volatile organic solvent (VOC) rate and leaves a high film thickness on the applied surface.

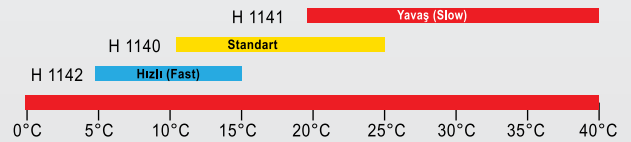

H 1140 / H 1141 / H 1142

Net Filling	Pcs per Box	Boxes per Pallet
0,5 Lt	12 Pcs	120 Boxes
2,5 Lt	6 Pcs	72 Boxes
Type: Fast, Standart, Slow		HS Code: 3210.00.10.00.12



2Mixing Ratio
(100:50:0-10)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

► SERTLEŐTİRİCİ GRUBU hardener group

H1120



Megamix® 2K Universal Akrilik Sertleőtirici Universal Acrylic Hardener



► Megamix® 2K Universal Akrilik Sertleőtirici


Ürün Açıklaması

2K Akrilik Astar, vernik ve son katlar için geliştirilmiş çok amaçlı izosiyanat esaslı ekonomik sertleőtiricidir. Kullanım Kılavuzlarında belirtilen oranlarda kullanılmalıdır. Yavaş, Standart ve Hızlı Megamix® 2K Üniversal Akrilik Sertleőtiricisi, uygulama ortam sıcaklığına ve tamir edilecek yüzeyin büyüklüğüne göre belirlenmelidir.


► Megamix® 2K Universal Acrylic Hardener

Product Description:

2K Acrylic Hardener is a multi-purpose isocyanate based economical hardener developed for clearcoats and topcoats. It should be used at the rates specified in the User Manuals. Slow, Standart and Megamix® 2K Universal Acrylic Hardener should be preferred according to the current weather conditions and the size of the surface.

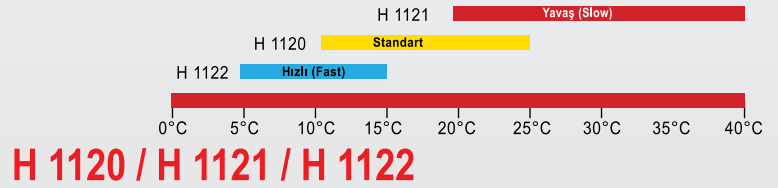

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	150 Boxes
0,5 Lt	12 Pcs	120 Boxes
1 Lt	12 Pcs	80 Boxes
2,5 Lt	6 Pcs	72 Boxes
Type: Fast, Standart, Slow		HS Code: 3210.00.10.00.12



Mixing Ratio
(100:50:10-25)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

Acryhard® 2K 4+1 Akrilik Astar Sertleştirici

Acrylic Filler Hardener



H2120

► Acryhard® 2K 4+1 Akrilik Astar Sertleştirici

Ürün Açıklaması

ACRYFILL-MEGAMIX 2K 4+1 Akrilik Astarlar , için özel tasarlanmış sertleştiricidir. Diğer sertleştiricilere göre maliyet ve fiyat avantajı vardır. ACRYFILL-MEGAMIX 2K 4+1 Akrilik Astar ile birlikte kullanıldığında hızlı ve tam kuruma sağlayıp, mükemmel netice verir. ACRYFILL-MEGAMIX 2K astarlar ile ACRYHARD 2K, sertleştiricinin set olarak kullanılması tavsiye edilir.

Kullanım Şekli

Kullanım kılavuzunda belirtilen oranlarda kullanılır.

► Acryhard® 2K 4+1 Acrylic Filler Hardener


Product Description:

ACRYFILL-MEGAMIX 2K 4+1 is a hardener specially designed for acrylic fillers. It has cost and price advantages over other hardeners. When used with ACRYFILL - MEGAMIX 2K 4+1 Acrylic Filler, it provides fast and complete drying and gives excellent results. It is recommended to use ACRYFILL-MEGAMIX 2K fillers and ACRYHARD 2K, hardener as a set.

Product Usage:

It is used at the rates specified in the instructions for use.

Net Filling	Pcs per Box	Boxes per Pallet
0,20 Lt	12 Pcs	150 Boxes
0,25 Lt	12 Pcs	150 Boxes
0,625 Lt	12 Pcs	80 Boxes
0,946 Lt (1/4 US Gallon)	12 Pcs	80 Boxes
HS Code: 3210.00.10.00.12		

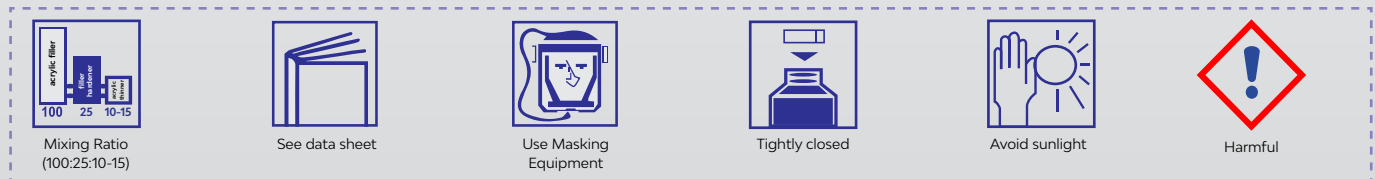

05

► astar grubu filler group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

www.icmpolitek.com.tr

05

▶ ASTAR GRUBU filler group

Acryfill® 2K 4+1 Akrilik Astar Acrylic Filler



▶ Acryfill® 2K 4+1 Akrilik Astar

Ürün Açıklaması:

İki bileşenli dolgu ve yapışma özelliği yüksek, hızlı kuruyan ve kolay zımparalanır akrilik içerikli astar. 100 ml'de 25 ml. (4:1) ACRYHARD® UV 2K Universal Akrilik Sertleştiricisi veya ACRYHARD® 2K Akrilik Astar Sertleştiricisi ile birlikte kullanılır. İsteğe göre 10-30 ml. ACRYTHIN® 2K Universal Akrilik Tiner ile inceltilir. 20°C'de 2-3 saatte, 60°C'de 30 dakikada, kısa dalga infrared kurutucuda 10-20 dakikada zımparaya hazır olup, hava kurumada 24 saatte tam olarak kurur.

Kullanım Şekli:

En iyi netice, uygun meme çaplı pistole kullanılarak 2-3 tek kat uygulandığında alınır. Çıplak sac galvaniz kaplama, polyester macunlu ve eski boyalı yüzeyler üzerine izolasyon sağlamak için kullanılabilir.

▶ Acryfill® 2K 4+1 Acrylic Filler

Product Description:

Two-component acrylic filler with high adherence properties, fast drying and easy sanding. It is used with ACRYHARD® hardener or ACYRHARD® 2K Acrylic Hardener at ratio of 25 ml per 100 ml. (4:1). It is thinned with 10-30 ml of ACRYTHIN® 2K Universal Acrylic Thinner upon request. It is ready for sanding in 2-3 hours at 20°C, 30 minutes at 60°C, 10-20 minutes in a short wave infrared dryer and dries completely in 24 hours in open air.

Product Usage:

The best results can be achieved when applied with spray filler as 2-3 layers. It can be used on iron, galvanized, polyester putty and old painted surfaces to make the last layer look perfect.



F1110

Net Filling	Pcs per Box	Boxes per Pallet
0,80 Lt	12 Pcs	75 Boxes
1 Lt	12 Pcs	75 Boxes
2,5 Lt	4 Pcs	72 Boxes
3,785 Lt (1 US Gallon)	4 Pcs	63 Boxes
25 Kg	1 Pcs	36 Buckets
Color : Gray, White, Black		HS Code: 3208.20.90.00.11

Mixing Ratio (100:25:10-30)	DIN CUP4/20°C 17-21 sec	Gun nozzle: 1.6-1.8 mm	Spraying coat: 2-3 single coat	Flash off: 5-10 min	Drying: 2-3 hours (20°C) 30 min (60°C)	Infrared: 10-20 min	Wet Sanding: P400-P600 P600-P1000	Dry Sanding: P320-P360 P360-P400	See data sheet	Use Masking Equipment

▶ ASTAR GRUBU filler group

F2221



Politek® 1K Primer Astar Priming Filler



▶ Politek® 1K Primer Astar

Ürün Açıklaması:

Oto tamir sektörü ve hızlı kurumanın tercih edildiği sanayi sektörlerinde kullanılır. Modifiye alkid ve nitroselüöz reçineleri içeren, dolgu gücü ve zımparalama özelliği yüksek, hızlı hava kurumalı bir üründür.

Kullanım Şekli:

1K Primer Astar 1:1 oranında Selülozik Tiner ile inceltilerek hava emişli klasik boya pistolesi ile (1.4 - 1.8 mm meme çapında) 3-4 bar uygulama basıncında 2-3 tek kat uygulanabilir. Kuruma süreleri ortam sıcaklığına ve nemine bağlı olarak değişir. 20-30 dakika içerisinde zımparaya hazır hale gelir.

▶ Politek® 1K Priming Filler

Product Description:

It is used in the auto repair sector and industrial sectors where fast drying is preferred. It is a fast air-drying product containing modified alkyd and nitrocellulose resins with high filling power and sanding properties.

Product Usage:

1K Primer Filler can be thinned with Cellulosic Thinner at a ratio of 1:1 and applied in 2-3 single coats with an air suction classic spray gun (1.4 - 1.8 mm nozzle diameter) at 3-4 bar application pressure. Drying times vary depending on ambient temperature and humidity. It is ready for sanding within 20-30 minutes

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
2,5 Lt	4 Pcs	72 Boxes
3,785 Lt (1 US Gallon)	4 Pcs	63 Boxes
18 Kg	1 Pcs	36 Buckets
Color : Gray, White, Black		HS Code: 3208.20.90.00.11

Mixing Ratio (100:100)	DIN CUP4/20°C 17-20 sec	Gun nozzle: 1.4-1.8 mm Working pressure: 3-4 bar	Spraying coat: 2-3 single coat	Flash off: 5-10 min	Drying (20°C): Touch-dry 20-30 min, Sanding 2-3 hours	Wet Sanding: P600-P1000	Dry Sanding: P360-P400	See data sheet	Use Masking Equipment

Politek® Polyester Sprey Astar + Sertleştiricisi

Polyester Spray Filler + Activator



▶ Politek® Polyester Sprey Astar + Sertleştiricisi

Ürün Açıklaması:

İki bileşenli, dolgu gücü yüksek, gözenek bırakmayan, geniş-derin çizikli ve kritik yüzey kusurlarını izole eden, kolay zımparalanır polyester içerikli dolgu astarıdır. Meme çapı 2.0-3,5 mm, uygulama basıncı 2-4 bar olan astar tabancasıyla uygulanır. Hızlı kuruma özelliğine sahiptir.

Kullanım Şekli:

%2 oranında Polyester Astar Sertleştiricisi ile karıştırıldığında 20°C'de kullanım ömrü 30 dakika olup, hava kuruma ile 20°C'de 2 saat, fırın kuruma 60°C'de 30 dakikada tamamen kurur. Son kat uygulamadan önce Polyester Astarın üzerine mutlaka 2K Akrilik Astar uygulanmalıdır.

Sac, polyester yüzeyler ve tüm polyester macun yüzeylerine uygulanabilir.

▶ Politek® Polyester Polyester Spray Filler + Activator

Product Description:

It is a two-component, high filler primer with high filling power, leaves no pores, isolates wide-deep scratches and critical surface defects, and is easy to sand. It is applied with a spray gun 2.0-3,5 mm diameter and at a pressure of 2-4 bar. It has fast drying feature.

Product Usage:

When mixed with 2% Polyester Filler Hardener, the service life is 30 minutes at 20°C, air drying is 2 hours at 20°C and oven drying is 30 minutes at 60°C. Before applying the finishing coat, 2K Acrylic Primer must be applied on top of the Polyester Filler. It can be applied to sheet metal, polyester surfaces and all polyester putty surfaces.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
18 kg	1 Pcs	36 Boxes
Color : Gray		HS Code: 3208.20.90.00.11

Mixing Ratio (100:2)	DIN CUP4/20°C 30-35 sec	Gun nozzle: 2.0-3.5 mm	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Drying: 2 hours (20°C) 30 min (60°C)	Dry Sanding: P180-P280	See data sheet	Use Masking Equipment

▶ ASTAR GRUBU filler group

F4230



1K Plastik Yüzey Astarı (Gümüş, Şeffaf)

1K Plastic Surface
Primer (Silver, Transparent)



▶ 1K Plastik Yüzey Astarı (Gümüş, Şeffaf)

Ürün Açıklaması:

PP/EPDM, PUR, PVC ve diğer plastik yüzeylerin (araçların tamponları, yan kaplama çıtaları, plastik kökenli gövde parçaları vb.) astarlanması ve son kat boyanın plastik yüzeye güvenle yapışması için dizayn edilmiş, kullanıma hazır, yağ üzeri yağ boyama imkanı sağlayan plastik yapışma astarıdır.

Kullanım Şekli:

Uygulama yapılacak yüzeyler önerildiği şekilde hazırlanmalı, temizlenmeli (yağ ve kirden) ve kurutulmalıdır. 1-2 tek kat olarak ince katlar halinde uygulanmalıdır. Çok kalın uygulama yapışmayı zayıflatır. Önerilen kalınlık 3-4 mikrondur. Oda sıcaklığında 15-20 dakika sonra üzerine bazkat veya sonkat boya uygulaması yapılabilir.

▶ 1K Plastic Surface Primer (Silver, Transparent)

Product Description:

It is a ready-to-use plastic adhesion primer designed for priming PP/EPDM, PUR, PVC and other plastic surfaces (vehicle bumpers, side trim strips, body parts of plastic origin, etc.) and for the topcoat to adhere securely to the plastic surface.

Product Usage:

The application surfaces should be prepared, cleaned (from grease and dirt) and dried as recommended. It should be applied in thin layers as 1-2 single coats. Too thick application weakens adhesion. The recommended thickness is 3-4 microns. After 15-20 minutes at room temperature, basecoat or topcoat paint can be applied.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
Color : Silver, Transparent		HS Code: 3208.20.90.00.11

 Mixing Ratio Ready to use	 DIN CUP4/20°C 15-16 sec	 Gun nozzle: 1.3-1.5 mm	 Spraying coat: 1-2 single coat	 Flash off: 2-3 min	 Drying: 15-20 min (20°C)	 Topcoat paint (wet on wet paint) (15-20 min)	 See data sheet	 Use Masking Equipment
---	--	--	--	--	--	--	---	---

1K Plastik Yüzey Astarı
(Gray)1K Plastic Surface
Primer (Gray)

F4231

▶ 1K Plastik Yüzey Astarı (Gri)

Ürün Açıklaması:

1K Plastik Yüzey Astarı, değişik yapıdaki plastik yüzeyler (PP, PP/EDPM, ABS, PE, PUR, PBT, PC, PVC, NAYLON, TPO, PPO, XENOY) üzerine uygulanacak son kat boya, vernik ve astarların yapışmasını sağlar.

Kullanım Şekli:

Uygulama yapılacak yüzeyin daha iyi yapışma sağlaması için kir, silikon ve yağdan arındırılması gerekmektedir. Plastik astar uygulanmadan önce plastik yüzeylerin kuru olması gerekmektedir. 1-2 tek kat olarak ince katlar halinde uygulanmalıdır. Çok daha kalın uygulamalar yapışmanın azalmasına neden olabilir. Önerilen kalınlık 15-20 mikron civarındır. Oda sıcaklığında 15-20 dakika sonra üzerine bazkat veya sonkat boya uygulaması yapılabilir.

▶ 1K Plastic Surface Primer (Grey)

Product Description:

1K Plastic Surface Primer provides adhesion of topcoat paints, clearcoats and primers to be applied on plastic surfaces of different structures (PP, PP/EDPM, ABS, PE, PUR, PBT, PC, PVC, NYLON, TPO, PPO, XENOY).

Product Usage:

The application surface should be cleaned from dirt, silicone and oil for better adhesion. Plastic surfaces must be dry before applying plastic primer. It should be applied in thin coats as 1-2 single coats. Much thicker applications may result in reduced adhesion. The recommended thickness is around 15-20 microns. After 15-20 minutes at room temperature, basecoat or topcoat paint can be applied

Net Filling	Pcs per Box	Boxes per Pallet
0,5 Lt	12 Pcs	120 Boxes
1 Lt	12 Pcs	80 Boxes
Color : Gray		HS Code: 3208.20.90.00.11

Not : Islak Uygulama

Notes : Wet on Wet

Mixing Ratio Ready to use	DIN CUP4/20°C 15-16 sec	Gun nozzle: 1.3-1.5 mm Working pressure: 2.7-3.3 bar	Spraying coat: 1 single + 1 double coat	Flash off: 2-3 min	Drying: 25-30 min (20°C)	Wet Sanding: P800-P1000	Topcoat paint (wet on wet paint) (10-15 min)	See data sheet	Use Masking Equipment

► ASTAR GRUBU filler group

F2220



Politek® Galvano 1K Galvaniz-Alüminyum Sac Astarı

Galvano 1K Galvanized-
Aluminum Etching Primer



► Politek® Galvano 1K Galvaniz-Alüminyum Sac Astarı

Ürün Açıklaması:

Makina, gemi, otomotiv ve ağır metal sanayisinde, zirai aletler üretiminde ve yüksek nem içeren bütün ortamlarda (seralar), her türlü metal yüzeyler (DKP Sac, Çinko Kaplama ve Galvaniz, Alüminyum vb.) üzerinde kullanılabilen istenildiğinde yüksek film kalınlığı verebilen, çabuk kuruyan, uygulama sonrası yüzey düzeltmesi (zımparalaması) kolay, korozyon (pas önleme) direnci yüksek olan mükemmel yapışma özellikli hava kurumalı çinko kromat esaslı bir astardır.

Kullanım Şekli:

Kutu iyice karıştırıldıktan sonra 100 kısım Galvano 1K Galvaniz-Alüminyum Sac Astarına, 50 kısım Selülozik Tiner ilavesi yapılarak hava emişli klasik boya pistolesi ile (1.3 - 1.8 mm meme çapında) 3-4 bar uygulama basıncında 2-3 tek kat (45-50 mikron) uygulanabilir. Kuruma süreleri ortam sıcaklığına ve nemine bağlı olarak değişir. 30-40 dakika içerisinde zımparaya hazır hale gelir.

► Politek® Galvano 1K Galvanized-Aluminum Etching Primer

Product Description:

This is an air-drying zinc chromate based primer with excellent adhesion, which can be used on all kinds of metal surfaces (DKP Sheet, Zinc Coating and Galvanized, Aluminum etc.) in machinery, ship, automotive and heavy metal industries, in the production of agricultural tools and in all environments with high humidity (greenhouses) which can give high film thickness when desired, dries quickly, easy surface correction (sanding) after application, has high corrosion (rust prevention) resistance.

Product Usage:

After mixing the primer thoroughly, 100 parts of Galvano 1K Galvanized-Aluminum Etching Primer and 50 parts of Cellulosic Thinner can be added and 2-3 single coats (45-50 microns) can be applied with an air suction classical spray gun (1.3 - 1.8 mm nozzle diameter) at 3-4 bar application pressure. Drying times vary depending on ambient temperature and humidity. It is ready for sanding within 30-40 minutes.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
2,5 Lt	4 Pcs	72 Boxes
18 Kg	1 Pcs	36 Buckets

Color : Dark, Gray, Light, Gray HS Code: 3208.20.90.00.11

Mixing Ratio (100:50)	DIN CUP4/20°C 20-22 sec	Gun nozzle: 1.3-1.8 mm	Spraying coat: 2-3 single coat	Flash off: 10 min	Drying: 30-40 min (20°C)	Wet Sanding: P600-800	Dry Sanding: P320-400	See data sheet	Use Masking Equipment

ColorTEC® Endüstriyel Astar Industrial Primer



F6210

▶ ColorTEC® Endüstriyel Astar

Ürün Açıklaması:

Ahşap ve metal yüzeylerde kullanılabilen, çabuk kuruyan hava kurumalı, parlak ve kapaticılığı yüksek styrene alkit esaslı hava kurumalı bir son kat astardır. Değişik sanayi dallarında bütün metal ve ahşap yüzeylerde; ziraat aletleri, traktörler, çelik eşya ve el aletleri ayrıca elektrik motorları, su pompaları, askeri donanımlarda dahil olmak üzere bütün sanayi üretimlerinde püskürtme, rulo-fırça veya daldırma yöntemleri kullanılarak temiz ve kuru yüzeylere başarı ile uygulanabilir.

Kullanım Şekli:

Kutu içine karıştırıldıktan sonra 100 kısım ColorTEC® Endüstriyel Astara 20-25 kısım ColorTEC® Endüstriyel Tiner ilave edilerek 2 kat pistole uygulaması yapılır. Tek kat uygulamada 35-40 mikron kuru film kalınlığı verir. 1 litre ile 8-10 m² alan boyanabilir. 20°C ortam sıcaklığında toz kuruması 5-10 dk, dokunma kuruması 20-30 dk, Montaj 1-2 saat'dir.

▶ ColorTEC® Industrial Primer



Product Description:

It is a styrene alkyd based air-drying topcoat primer that can be used on wood and metal surfaces, dries quickly, has high gloss and high coverage. It can be successfully applied to clean and dry surfaces using spraying, roller-brush or dipping methods on all metal and wooden surfaces in various industrial branches; agricultural tools, tractors, steel goods and hand tools, as well as in all industrial productions including electric motors, water pumps, military equipment.

Product Usage:

After mixing the primer thoroughly, add 20-25 parts of ColorTEC® Industrial Thinner to 100 parts of ColorTEC® Industrial Primer and apply 2 coats of airbrush. It gives 35-40 micron dry film thickness in single coat application. 8-10 m² area can be painted with 1 liter. At 20°C ambient temperature, powder drying time is 5-10 minutes, touch drying time is 20-30 minutes, installation time is 1-2 hours.

Net Filling	Pcs per Box	Boxes per Pallet
0,75 Lt	12 Pcs	75 Boxes
2,5 Kg	4 Pcs	72 Boxes
18 Kg	1 Pcs	36 Buckets
Color : Gray (RAL 7040), White		HS Code: 3208.20.90.00.11

										
Mixing Ratio (100:20-25)	DIN CUP4/20°C 17-18 sec	Gun nozzle: 1.6- 1.8 mm Working pressure: 3-4 bar	Spraying coat: 1-2 single coat	Flash off: 5-10 min	Applicable with brush	Drying: 1-2 hours (20°C)	Dry Sanding: P320-400	Wet Sanding: P500-800	See data sheet	Use Masking Equipment

► ASTAR GRUBU filler group

F5320



ColorTEC® Metal Primer Sac Astarı+ Aktivatörü Metal Etching Primer+ Activator



► ColorTEC® Metal Primer Sac Astarı + Aktivatörü

Ürün Açıklaması:

Makina, gemi, otomotiv ve ağır metal sanayisinde, zirai aletler üretiminde her türlü metal yüzeyler (DKP Sac, Çinko Kaplama ve Galvaniz, Alüminyum vb.) üzerinde kullanılabilen iki bileşenli hızlı hava kurumalı rapid esaslı bir sac astarıdır. Fırça, pistole veya daldırma yöntemi ile uygulamaya müsait olup, çok hızlı kuruma özelliği, korozyon (pas önleme) direnci yüksek olan mükemmel yapışma özellikli hava kurumalı asit karakterli bir sac astarıdır.

Kullanım Şekli:

2 kısım ColorTEC® Metal Primer astar 1 kısım (%50) ColorTEC® Metal Primer astar aktivatörü ile inceltilecek hava emişli klasik boya pistolesi ile (1.4 - 1.8 mm meme çapında) 2.9-3.3 bar uygulama basıncında 1-2 tek kat uygulanabilir. Karşıma gerekirse viskozite ayarlamak için selülozik tiner ilavesi yapılabilir. Kuruma süreleri ortam sıcaklığına ve nemine bağlı olarak değişir. 20-30 dakika içerisinde zımparaya hazır hale gelir. Metal primer üzerine polyester esaslı macun ve astarların uygulanması tavsiye edilmez. Metal primer aktivatörü asit içermekte olup diğer ürünlerle kesinlikle karıştırılmamalıdır.

► ColorTEC® Metal Etching Primer + Activator

Product Description:

It is a two-component fast air drying rapid based etching primer that can be used on all kinds of metal surfaces (DKP Sheet, Zinc Coating and Galvanized, Aluminum, etc.) in machinery, ship, automotive and heavy metal industry, agricultural tools production. It is a very fast drying, air drying, acidic metal etching primer with high corrosion (rust prevention) resistance and excellent adhesion, suitable for application by brush, airbrush or dipping method.

Product Usage:

2 parts of ColorTEC® Metal Primer filler can be thinned with 1 part (50%) ColorTEC® Metal Primer filler activator and applied in 1-2 single coats with air suction conventional spray gun (1.4 - 1.8 mm nozzle diameter) at 2.9-3.3 bar application pressure. Cellulosic thinner can be added to the mixture to adjust the viscosity if necessary. Drying times vary depending on ambient temperature and humidity. It is ready for sanding within 20-30 minutes. It is not recommended to apply polyester based putties and primers on metal primer. Metal primer activator contains acid and should never be mixed with other products.

Net Filling	Pcs per Box	Boxes per Pallet
0,9 Lt + 0,45 Lt (Activator)	12 Pcs	45 Boxes
Color : Green		HS Code: 3208.20.90.00.11

 Mixing Ratio (100:50)	 DIN CUP4/20°C 19-21 sec	 Gun nozzle: 1.4-1.8 mm	 Spraying coat: 1-2 single coat	 Flash off: 5-10 min	 Applicable with brush	 Drying: 20-30 min (20°C)	 Dry Sanding: P360-400	 See data sheet	 Use Masking Equipment
---	--	--	--	---	---	--	---	---	---

06

► tiner grubu thinner group




POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

► TİNER GRUBU thinner group

T1230



Acrythin® 2K Universal Akrilik Tiner Universal Acrylic Thinner

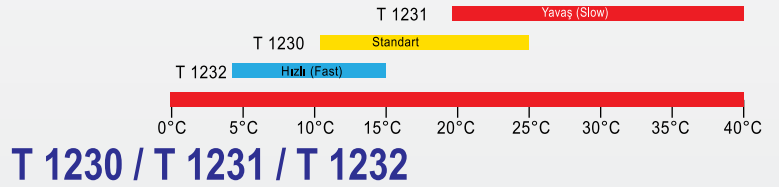

► Acrythin® 2K Universal Akrilik Tiner

Ürün Açıklaması:

2K Akrilik Astarlar, vernikler ve son katlar için incelticidir, isteğe göre kullanılacak 2K Akrilik ürünlerin kullanım kılavuzlarında belirtilen oranlarda kullanılmalıdır.

Ortam hava sıcaklığı ve boyanacak alanın yüzey boyutuna bağlı olarak Yavaş, Standart, Hızlı tiner seçenekleri tercih edilebilir.


► Acrythin® 2K Universal Acrylic Thinner

Product Description:

2K Acrylic is a thinner for fillers, clearcoats and topcoats, it should be used in the ratios specified in the user manuals of the 2K Acrylic products to be used optionally. Depending on the ambient air temperature and the surface size of the area to be painted, Slow, Standard, Fast thinner options can be preferred.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
2,5 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes
18 Lt	1 pcs	36 Boxes

Type:Fast,Standart,Slow HS CODE:3814.00.90.00.19



Mixing Ratio
(100:50:10-25)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight




Harmful

06

► TİNER GRUBU thinner group

Politek Basethin® 2K Bazkat Boya Tineri Basecoat Thinner



T 2230 / T 2231

► Politek Basethin® 2K Bazkat Boya Tineri

Ürün Açıklaması:

Akrilik bazlı basecoat boyaların inceltmesinde ve viskozitelerini ayarlanmasında kullanılmak için geliştirilmiş bir tinerdir. Özellikle yüksek metal stapa içerikli gümüş ve açık tonlu metalik boyalarda, metal efektlerinin homojen dağılmasını ve gölgelenme problemini önlemek için kullanılır. Ayrıca sıcak havalarda en uygun boya atomizasyonunu sağlar. Metalik boya üzerinde mumlu bez (tagrack) ile silinme imkanı sağlar.

Kullanım Şekli:

4-28 °C de standart basecoat tiner 17-40°C de yavaş Basecoat tiner ürün bilgi formlarında önerildiği oranda kullanılır.

► Politek Basethin® 2K Basecoat Thinner


Product Description:

It is a thinner developed for thinning acrylic based basecoat paints and adjusting their viscosity. It is used especially in silver and light-toned metallic paints with high metal stapa content to prevent homogeneous distribution of metal effects and shadowing problem. It also provides optimal paint atomization in hot weather. It allows wiping with waxed cloth (tagrack) on metallic paint.

Product Usage:

Standard basecoat thinner at 4-28 °C and slow basecoat thinner at 17-40 °C are used at the rate recommended in the product data sheets.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
2,5 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes
Type: Standart, Slow		HS Code: 3814.00.90.00.19



Mixing Ratio
(100:100)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

► TİNER GRUBU thinner group

T3230



Politek® 2K Yama Tineri Fade-Out Thinner



► Politek® 2K Yama Tineri

Ürün Açıklaması:

Oto boya tamiri pazarı ve endüstriyel imalat sanayi (beyaz eşya, ağır sanayi ekipmanları vb.) sektörlerinde son kat boya sonrasında oluşan renk farklılıklarının giderilmesi ve kenar alıştırma (yama) işlemlerinde kullanılmak amacıyla özel solvent ve reçinelerle geliştirilmiş bir üründür.

Kullanım Şekli:

Yama hazırlığı sonrası tamir amaçlı uygulanan boyanın ardından tamir edilen bölgenin merkezinden dışarıya doğru düşük hava basıncı ile uygulama yapılır. Boya + Tiner karışımına yaklaşık %50 ilave edilerek uygulanabilir veya boya, vernik tamir kenarına doğrudan atılabilir. Renk kontrolü için doğru ışık kaynağı olan ortamlarda kontrol edilmelidir. Aksi takdirde metamorfizma problemi oluşabilir.

► Politek® 2K Fade-Out Thinner

Product Description:


It is a product developed with special solvents and resins to be used in the auto paint repair market and industrial manufacturing industry (white goods, heavy industrial equipment, etc.) sectors for the removal of color differences after topcoat paint and edge lapping (fade-out) processes.

Product Usage:

After the paint applied for repair after fade-out preparation, application is made with low air pressure from the center of the repaired area outwards. It can be applied by adding approximately 50% to the Paint + Thinner mixture or can be applied directly to the paint, clearcoat repair edge. It should be checked in environments with the right light source for color control. Otherwise, metamorphism may be a problem.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
2,5 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes

HS Code: 3814.00.90.00.19

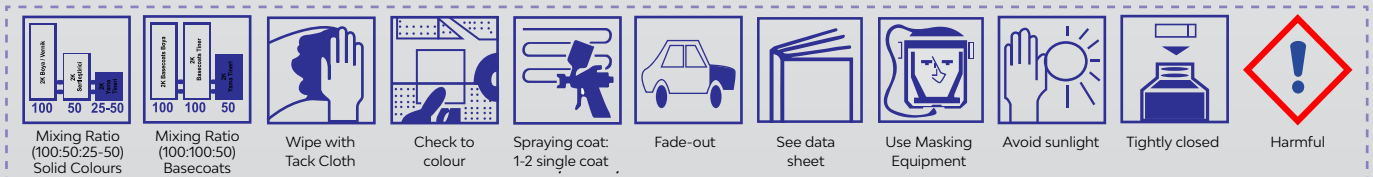

Politek® Yüzey Temizleme Tineri Surface Cleaning Thinner



T5230

► Politek® Yüzey Temizleme Tineri

Ürün Açıklaması:

Çıplak Metal, astarlı ve eski boyalı yüzeylerin temizlenmesi amacıyla geliştirilmiştir. Metal yüzeylerde yağ alma görevi yaparken, astarlı ve boyalı yüzeylerde zımpara tozu, parmak izi ve diğer kirlilikleri giderme amacı ile kullanılır. Krater (silikon beneklenmesi) açmasını önler. Astarlı ve boyalı yüzeyleri çözmez.

Kullanım Şekli:

Silme işlemi öncesi yüzeydeki zımpara tozlarının hava tutularak alınması tavsiye edilir. Temiz ve tıy bırakmayan bir bez ile temizlenmesi istenen yüzey silinir ve kuru bir bez ile hemen kurulur. Bu tiner ürün inceltilmesinde kullanılmamalıdır.

► Politek® Surface Cleaning Thinner

Product Description:

It has been developed for cleaning bare metal, primed and old painted surfaces. It can be used to eliminate finger-prints and other dirt; sand-paper dusts over primer coated and painted surfaces while de-greasing procedure is being done on metal surfaces. It prevents crater (silicone) forming. It does not solve with primer coated and painted surfaces.

Product Usage:

Prior to wiping process, it is recommended to apply compressed air in order to eliminate the sandpaper dusts over the surface. The surface wished to be cleaned is wiped by using a clean and non-fluffing cloth and then quickly dried with a dry cloth. The surface cleaning thinner should not be used for thinning the product.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	80 Boxes
2,5 Lt	6 Pcs	72 Boxes
5 Lt	4 Pcs	54 Boxes
HS Code: 3814.00.90.00.19		



Clean-Degrease



See data sheet

Use Masking
Equipment

Tightly closed



Avoid sunlight



Harmful

► TİNER GRUBU thinner group

T8234



ColorTEC® Silikon Esaslı Yüksek Isıya Dayanıklı Boya Tineri Silicone-Based High- Temperature Resistant Paint Thinner



► ColorTEC® Silikon Esaslı Yüksek Isıya Dayanıklı Boya Tineri

Ürün Açıklaması:

Silikon Esaslı Yüksek Isıya Dayanıklı Boyanın Ürün Kullanımı ve Karışım Oranında belirtilen oranlarda inceltilmesinde kullanılır. Boyanın yüzeye yayılmasına ve daha iyi yapışmasına yardımcı olur.

Kullanım Şekli:

Silikon Esaslı Yüksek Isıya Dayanıklı Boya Tineri 4-28°C' de kullanılır.

► ColorTEC® Silicone-Based High- Temperature Resistant Paint Thinner


Product Description:

Used to thin silicone-based, high-temperature paint according to the ratios specified in the Product Usage and Mixing Ratio. It helps the paint thicken and spread more effectively.

Product Usage:

Silicone-based, high-temperature paint thinner is used at temperatures between 4-28°C.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	6 Pcs	75 Boxes
18 Kg	1 Pcs	36 Boxes
HS Code: 3814.00.90.00.19		



Mixing Ratio
(100:50)



See data sheet



Use Masking
Equipment



Avoid sunlight



Tightly closed



Harmful



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

07

► yardımcı ürün grubu auxiliary product group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

Darbe Koruyucu Pütür (Kauçuk Esaslı)

Stonechip Protector
Antigravel (Rubber Based)



A2100

Darbe Koruyucu Pütür (Kauçuk Esaslı)

Ürün Açıklaması:

Otomobillerin ve ticari araçların taş çarpmasına maruz kalan bölgelerine (araç tabanları, çamurluk içleri vb.) uygulanmak amacıyla geliştirilmiştir. Aynı zamanda ses ve ısı izolasyonu sağlar ayrıca yıpratıcı mineral tuzlarına karşı araç gövdesini koruma özelliğine sahiptir.

Modifiye alkid reçinesi ve yapışmayı arttırıcı özel katkıları içermektedir.

Kullanım Şekli:

Kirlerden arındırılmış yüzeye özel pütür tabancası veya fırça ile uygulanabilir.

5-6 saat sonra üzerine boya uygulaması yapılabilir.

Stonechip Protector Antigravel (Rubber Based)

Product Description:

It has been developed to be applied to areas of automobiles and commercial vehicles exposed to stone impact (vehicle floors, fender interiors, etc.). It also provides sound and heat insulation and has the ability to protect the vehicle body against corrosive mineral salts. It contains modified alkyd resin and special additives to increase adhesion.

Product Usage:

It can be applied to the surface cleaned from dirt with a special Stonechip gun or brush. Paint can be applied after 5-6 hours.

Net Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	66 Boxes
Color: Black, White, Gray		HS Code: 3208.20.90.00.11



Clean-Degrease



Gun nozzle:
3.0-4.0 mm



Spraying coat:
1-2 single coat



Drying: 5-6
hours (20 °C)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

► YARDIMCI ÜRÜN GRUBU

auxiliary product group

A2200



1K Plastik Tampon Boyası

1K Plastic Bumper Paint



► 1K Plastik Tampon Boyası

Ürün Açıklaması:

PP/EPDM, PUR, PVC ve diğer plastik yüzeylerin (araçların tamponları, yan kaplama çitaları, plastik kökenli gövde parçaları vb.) boyanması için dizayn edilmiş, altta plastik yapışma astarı kullanılmadan doğrudan uygulanabilen, yağ üzeri yağ boyama imkanı sağlayan son kat boyadır.

Kullanım Şekli:

Uygulama yapılacak yüzeyler önerildiği şekilde hazırlanmalı, temizlenmeli (yağ ve kirden) ve kurutulmalıdır. Selülozik esaslı tinerler ile % 20-25 oranında inceltilerek 2-3 tek kat olarak uygulanmalıdır. Çok kalın uygulama yapışmayı zayıflatır. Önerilen kalınlık 45-50 mikrondur. Oda sıcaklığında 60 dakika sonra montaj kuruması sağlanır.

► 1K Plastic Bumper Paint

Product Description:

It is a topcoat paint designed for painting PP/EPDM, PUR, PVC and other plastic surfaces (vehicle bumpers, side trim strips, body parts of plastic origin, etc.), which can be applied directly without the use of plastic adhesion primer underneath, allowing wet-on-wet painting.

Product Usage:

The application surfaces should be prepared, cleaned (from grease and dirt) and dried as recommended. It should be thinned by 20-25% with cellulosic based thinners and applied in 2-3 single coats. Too thick application weakens adhesion. The recommended thickness is 45-50 microns. The assembly is allowed to dry after 60 minutes at room temperature.

Net Filling	Pcs per Box	Boxes per Pallet
1 Lt	12 Pcs	75 Boxes
Color : Black, White, Gray		HS Code: 3208.20.90.00.11

 Mixing Ratio (100:20-25)	 DIN CUP4/20°C 15-16 sec.	 Gun nozzle: 1.3- 1.5 mm Working pressure: 2- 3 bar	 Spraying coat: 2-3 single coat	 Uygulama Basıncı (Working pressure) 3.0-3.5 bar Flash off: 5-10 min	 Drying: 60 min (20°C)	 Polishing	 See data sheet	 Use Masking Equipment
--	---	---	---	--	---	---	---	---

07

► YARDIMCI ÜRÜN GRUBU

auxiliary product group

Antisilikon Katkı

Anti-Silicone Additive



A2300

► Antisilikon Katkı

Ürün Açıklaması:

Boya, vernik, ve astar uygulamalarında silikon bulaşması (uçması) nedeniyle oluşan krater açması sorununu gidermeye yönelik tasarlanmıştır. Yüzey gerilimini düzenleyici özel katkılar ve solventler içerir.

Kullanım Şekli:

Silikon bulaşması şiddetine bağlı olarak uygulamaya hazır ürünün 1 litresine kutunun kendi kapağı ile 1-2 kapak (5-10 ml) girilir.

► Anti-Silicone Additive


Product Description:

It is designed to eliminate the problem of cratering caused by silicone contamination (flying) in paint, clearcoat, and primer applications. It contains special additives and solvents to regulate surface tension.

Product Usage:

Depending on the amount of the silicon smearing 1-2 lids of the product's container around (5-10 ml) is added to the product ready to be applied.

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	150 Boxes
Color : Clear		HS Code: 3210.00.10.00.12



Mixing Ratio
(100:5-10)



See data sheet



Use Masking
Equipment



Tightly closed



Avoid sunlight



Harmful

► YARDIMCI ÜRÜN GRUBU

auxiliary product group

A2400



Extra Hızlandırıcı

Extra Accelerator



► Extra Hızlandırıcı

Ürün Açıklaması:

Akrilik 2K Son Kat Boya ve Verniklerin hızlı kurlenmesinin sağlayan bir katkıdır. Özellikle soğuk iklim şartlarında yapılan uygulamalarda kurumayı hızlandırır.

Kullanım Şekli:

Tüm Akrilik 2K Düz Renk Son Kat Boyalar ve Verniklerde kullanılabilir. İlave edilecek ürünün kurlenme hızına ve sertleştirici tipine bağlı olarak uygulamaya hazır durumda olan 1 litre ürüne, ürünün kendi ambalaj kapağı ile 2-4 kapak (10-20 ml) ilave edilir.

► Extra Accelerator

Product Description:

Acrylic 2K is an additive that provides fast curing of topcoat paints and clearcoats. It accelerates drying, especially in cold climate conditions.

Product Usage:

It can be used on all Acrylic 2K Solid Color Top Coats and Clearcoats. Depending on the curing speed of the product to be added and the hardener type, 2-4 caps (10-20 ml) are added to 1 liter of product ready for application with the product's own packaging cap.

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	150 Boxes
Color : Clear	HS Code: 3824.90.40.00.00	



Mixing Ratio
(100:10-20)



See data sheet



Use Masking
Equipment



Avoid sunlight



Tightly closed



Harmful

07

► YARDIMCI ÜRÜN GRUBU

auxiliary product group

Boya Sökücü

Paint Remover



A2500

► Boya Sökücü

Ürün Açıklaması:

Politek® boya sökücü metal yüzeyler üzerindeki her türlü boya, astar ve macunu sökme özelliğine sahip, su ile yıkanabilen bir üründür.

Kullanım Şekli:

Kullanıma hazır olan boya sökücü kalın bir tabaka halinde yüzeye fırça ile sürülür. Sökme işlemini hızlandırmak için gerekirse yüzey çizilebilir. 10-30 dakika arasında beklenilerek yüzeyden kalkan boya bir spatula yardımı ile kazınır. Eğer gerekirse aynı işlem yeniden uygulanabilir. Boya sökücü kullanımı sonrası yüzey su ile yıkanmalıdır. Plastik yüzeylere uygulanması tavsiye edilmez.

► Paint Remover

Product Description:

Politek® paint remover is a water washable product capable of removing all kinds of paint, primer and putty on metal surfaces.

Product Usage:

The ready-to-use paint remover is applied to the surface in a thick layer with a brush. The surface can be scratched if necessary to speed up the removal process. Wait for 10-30 minutes and scrape the paint off the surface with a spatula. If necessary, the same procedure can be repeated. After using paint remover, the surface should be washed with water. Not recommended for plastic surfaces.

Gross Filling	Pcs per Box	Boxes per Pallet
1 Kg	12 Pcs	80 Boxes
Color : Clear	HS Code: 3210.00.10.00.12	



▷ YARDIMCI ÜRÜN GRUBU

auxiliary product group

A2700



Mermer ve Taş Yapıştırıcısı

Marble and Stone Adhesive



▷ Mermer ve Taş Yapıştırıcısı

Ürün Açıklaması:

İki bileşenli, mermer, granit, traverten, kireçtaşı, doğal taş, çimstone, beton, gaz beton, seramik, ahşap parke, tuğla ankraj vb. yüzeylere yüksek yapışma kalitesine sahip, özel olarak tasarlanmış polyester bazlı yapıştırıcıdır.

Kullanım Şekli:

Yapıştırılacak yüzeyler, uygulamadan önce kir, toz ve yağdan arındırılmış olmalıdır. % 2-3 oranında BPO ile homojen şekilde karıştırıldığında, kullanıma hazır hale gelir.

Yapıştırılan yüzeyler uygulamadan 2 saat sonra montaja hazırdır.

▷ Marble and Stone Adhesive

Product Description:

It is a two-component, specially designed polyester-based adhesive with high adhesion quality on surfaces such as marble, granite, travertine, limestone, natural stone, grassstone, concrete, gas concrete, ceramic, wooden parquet, brick anchors, etc.

Product Usage:

The surfaces to be adhered must be cleaned from dirt, dust and oil before application. When mixed homogeneously with 2-3% BPO, it is ready for use. The adhered surfaces are ready for installation 2 hours after application.

Net Filling	Pcs per Box	Boxes per Pallet
1 kg	12 Pcs	84 Boxes
2700 g	6 Pcs	84 Boxes
Color : Beige, Red, Gray, Black, White, Transparent		HS Code: 3214.90.00.00.19



Clean-Degrease



Mixing Ratio
(100:2-3)



Pot Life: 5-8
min (20 °C)



Drying: 15-30
min (20 °C)



See data sheet



Use Masking
Equipment



Avoid sunlight

07

YARDIMCI ÜRÜN GRUBU

auxiliary product group

BEDLINER

Politek ICM® CROCO 2K Polyurethane Coating

Polyurethane Coating



A7142

Polyurethane Coating

Ürün Açıklaması:

İki komponentli akrilik poliüretan esaslı bir kaplama malzemesi olup, mekanik ve kimyasal direncinin çok yüksek olması nedeni ile değişik sanayi sektörlerinde çok geniş yelpazedeki işlerde güvenle kullanılabilir.

- *Oto Tamir Boya Sektöründe (Araç kaplamaları, şasiler, pickup bagajları vb.)
- *Arazi (off-road) araçların dış kaplamaları – askeri araçlarının kamuflaj işleri,
- *Karavan, kamyon ve otobüslerin iç zemin, taban ve gövde boyama işlerinde,
- *Denizcilik sektöründe, tekne içi ve dışı boyama ve kaplamalarında,
- *Her türlü aracın tuning/aksesuar işlerinde,
- *Dekorasyon – Mobilya sektörü, kaplama-ses yalıtımı vb. işlerde,
- *Sanayi tesislerinde, vinçlerde, forklift vb. araçların kaplamalarında,
- *Tarımsal iş makinelerinde (traktörler, biçerdöğerler vb.) şeklinde sıralanabilecek bir çok iş kolunda kullanılabilir.

Kullanım Şekli:

ICM CROCO Polyüretan Coating (Kaplama) ürünümüz iki komponentli olup kit olarak satılmaktadır. (A komponenti Croco ve B komponenti Croco Sertleştirici olarak 3:1 oranında inceltirilir.)

Ürünümüz siyah, beyaz ve şeffaf olarak piyasaya sürülmektedir. Şeffaf olarak üretilen ürünün içine maksimum % 10 oranında konsantre baz (Akrilik/Mix boya, endüstriyel boya,

sentetik boya vb.) girilerek ürün istenilen renge dönüştürülebilir.

1/1 ambalajda ürün kutusu içine sertleştirici girilerek aynı kapta inceltme yapılabilir.

1/1 ambalaj kolisi özel olarak dizayn edilmiş standlı koli şeklindedir.

Ürünün uygulanması sırasında klasik pütür tabancası, ayarlı pütür tabancası veya 2.0 - 2.5 mm meme çaplı klasik/HVLP pistole kullanılabilir.

Uygulama basıncı, meme çapı ve uygulama mesafesi değiştirilerek yüzey görünümü/textürü ayarlanabilir.

Polyurethane Coating

Product Description:

It is a two-component acrylic polyurethane based coating material and can be used safely in a wide range of works in different industrial sectors due to its very high mechanical and chemical resistance. *Auto Repair and Paint Sector (Vehicle coatings, chassis, pickup trunks, etc.)

*Exterior coatings of off-road vehicles - camouflage works of military vehicles,

*Interior floor, floor and body painting works of caravans, trucks and buses,

*In the marine industry, boat interior and exterior painting and coatings,

*In tuning / accessory works of all kinds of vehicles,

*Decoration - Furniture sector, coating-sound insulation etc. works,

*Industrial plants, cranes, forklifts, etc. coatings of vehicles,

*It can be used in many business lines that can be listed as agricultural machinery (tractors, harvesters, etc.).

Product Usage:

ICM CROCO Polyurethane Coating is sold as a two-component kit (Component A as Croco and Component B as Croco Hardener are diluted in a 3:1 ratio).

Our product is available in black, white and transparent.

A maximum of 10% concentrated base (acrylic/mix paint, industrial paint, synthetic paint, etc.) can be added into the transparent product and the product can be transformed into the desired color.

In 1/1 packaging, hardener can be added into the product box and thinning can be done in the same container.

1/1 packaging box is in the form of a specially designed box with stand.

During the application of the product, a conventional


airbrush gun, an adjustable airbrush gun or a conventional/HVLP

airbrush with a nozzle diameter of 2.0 - 2.5 mm can be used.


The surface appearance/texture can be adjusted by changing the application pressure, nozzle diameter and application distance.

Net Filling	Pcs per Box	Boxes per Pallet
0,6 Lt + 0,2 Lt (Sertleştirici)	6 Pcs	88 Boxes
Color : Black,White,Transparent		HS Code: 3208.20.90.00.11

BLACK / WHITE COLOURS

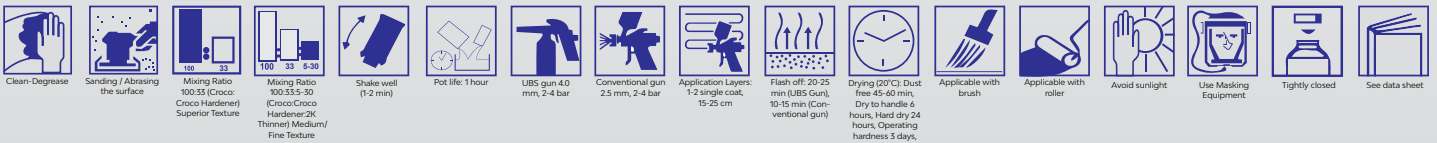

TRANSLUCENT/TINTABLE

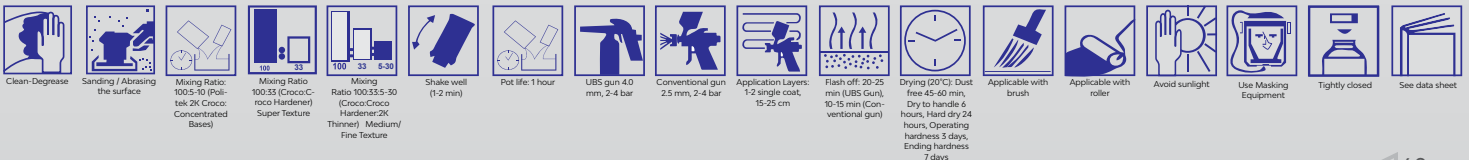

08

► bakım grubu car care product group



ÜRÜN SEÇİMİ / PRODUCT SELECTION

Pasta - Compound

Cila - Polish

P 800	P 1000	P 1200	P 1500	P 2000	P 3000
W 3110			W 3420		W 3130
		W 3210		W 5420 W 5520	
		W 3211			
		W 3212			

POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

Polycar® Universal Likit Pasta - Fast Cut INDUSTRY



► Polycar® Universal Likit Pasta - Fast Cut

Ürün Açıklaması:

Bütün boya yüzeylerinde (MS, HS, Seramik kaplamalı, yeni boyanmış veya kür olmuş) uygulanabilen yüksek kaliteli bir likit pastadır. P1200-1500 ve daha ince zımpara çiziklerini-hareleri kolaylıkla yüzeyden alıp tek kademede mükemmel parlaklık sağlar. Yüzeyde kurumadan uzun süreli çalışılabilir. Plastik yüzeylerde leke bırakmaz. Yıkınması ve silinmesi kolaydır. Hologram oluşturmaz, silikon içermez. Su bazlı olup düşük VOC değerlidir. Pasta sünger veya keçe (post) kullanılarak uygulama yapılabilir.

Kullanım Şekli:

Pasta uygulanacak yüzey P1200-1500 ve daha ince zımpara ile düzeltildikten sonra kutuda iyice çalkalanmış Universal Likit Pasta, sünger veya post tabanına, veya uygulama yüzeyine küçük bir miktarda sürülüp, yüzey hafifçe su ile ıslatıldıktan sonra 1200-1600 devir/dakika hız ile dönen pasta makinası ile yüzeye uygulanabilir. Yüzeyin performansına göre işlem tekrarlanabilir. İşlem sırasında yüzeyin kurumaması için bir sprey yardımı ile temiz su uygulanması tavsiye edilir. Pasta işlemi sonrasında istenirse extra parlaklık için Polycar Power Polish/Teflonlu Polish ile yüzey parlatılır.



► Polycar® Universal Liquid Compound - Fast Cut


Product Description:

It is a high quality liquid compound that can be applied on all paint surfaces (MS, HS, Ceramic coated, freshly painted or cured). It easily removes P1200-1500 and finer sanding scratches-marks from the surface and provides perfect shine at a single step. It can be applied for a long time without drying on the surface. It does not leave stains on plastic surfaces. Easy to wash and wipe off. It does not cause holograms and does not contain silicone. It is water-based and has low VOC value. It can be applied using a compound pad or lambswool.

Product Usage:

After smoothing the surface to be applied with P1200-1500 and finer sandpaper, thoroughly shaken Universal Liquid Paste can be applied to the sponge or lambswool base, or to the application surface in a small amount, and after the surface is slightly wetted with water, it can be applied to the surface with a pasting machine rotating at 1200-1600 rpm. The process can be repeated according to the performance of the surface. It is recommended to apply clean water with a sprayer to prevent the surface from drying out during the process. After the paste process, the surface is polished with Polycar Power Polish / Teflon Polish for extra shine if desired.

Net Filling	Pcs per Box	Boxes per Pallet
500 g	12 Pcs	110 Boxes
1000 g	12 Pcs	55 Boxes
Color : White		HS Code: 3405.30.00.00.00

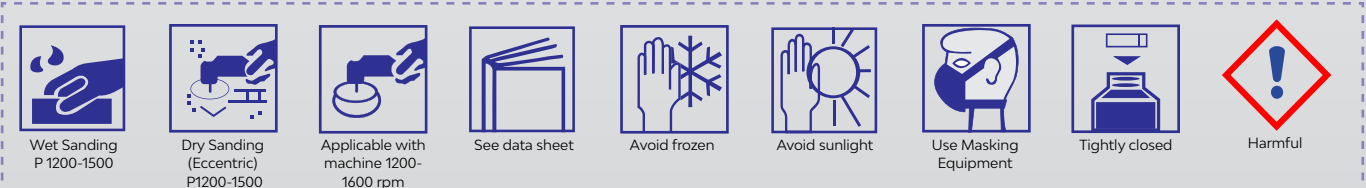

▷ bakım grubu car care product group

W3110



Polycar ExtraCut® Kalın Oto Pastası Rubbing Compound



▷ Polycar ExtraCut® Kalın Oto Pastası

Ürün Açıklaması:

Akrilik ve selülozik esaslı boya yüzeylerinde boya püskürtmesi sonrasında oluşan boya tozlarının ve zımpara izlerinin giderilmesinde; portakal görüntüsündeki yüzeylerin düzeltilmesi ve küçük boya akıntısı, tanecikleri veya sarkmalarının giderilmesinde ve fadeout (kenar alıştırma) uygulanacak boya yüzeylerinin matlaştırılması işleminde kullanılır. Ürün silikon içermez. Stoklama sırasında donmaktan korunmalıdır.

Kullanım Şekli:

Düzeltililecek olan boya yüzeyi P800 – P1200 Grat aşındırıcı zımpara ile düzeltilir. Polycar ExtraCut® kalın oto pastası pasta makinesi ve pasta süngerini ile 1200-1600 devir /dakika hızla veya temiz ve yumuşak bir bez ile elle yüzeye uygulanır. Ve yüzeydeki çizikler alınana kadar işleme devam edilir. İşlem sonrasında yüzey temizlenir. Gerekirse Polycar® İnce Polish Pasta uygulanarak yüzeyin son düzeltilmesi yapılır veya Polycar Power Polish® /Teflonlu Polish ile yüzey parlatılır.

▷ Polycar ExtraCut® Rubbing Compound

Product Description:

Rubbing Compound is applied to acrylic and cellulose paint surfaces to remove paint dusts, sanding paper marks, deep paint scratches, orange peeling surface images and paint sagging marks. It is also used before Fade-Out application to matte the paint surface and to remove paint dust and sanding marks after paint spraying on acrylic and cellulosic based paint surfaces. The product does not contain silicone. It must be protected from freezing during storage.

Product Usage:

Painted surface must be sanded by Wet P800– P1200 grade sanding paper. Polycar ExtraCut® rubbing compound is applied with a rubbing machine with 1200-1600 rpm speed or by hand with a clean and soft cloth. The process continues until the scratches on the surface are removed. The surface is cleaned after the process. If necessary, Polycar® Fine Polish Paste is applied for fine scratches and the surface is polished with Polycar Power Polish® or Teflon Polish.

Net Filling	Pcs per Box	Boxes per Pallet
500 g	12 Pcs	96 Boxes
1000 g	6 Pcs	128 Boxes
Color : Light Brown		HS Code: 3209.90.00.00.00



Wet Sanding:
P800-1200



Dry Sanding:
P1000-1200



Applicable by
hand



Applicable with
machine 1200-
1600 rpm



Shineable by
hand



Shineable by
machine



See data sheet



Avoid frozen



Avoid sunlight



Use Masking
Equipment



Harmful

Polycar® İnce Polish Pasta Fine Polish Paste



► Polycar®İnce Polish Pasta

Ürün Açıklaması:

Boya püskürtülmesi sonrasında oluşan boya tozlarının giderilmesinde, boya yüzeyindeki trafik kirliliğinin giderilmesi ve temizleme işlemlerinde, ince zımpara çiziklerinin alınması ve parlatma işlemlerinde başarı ile uygulanır. Uygulama sonrasında yıkama gerektirmez. Makina pasta tabanında toplam yapmaz, mükemmel parlaklık verir, silikon içermez, her türlü akrilik, selülozik, sentetik boya yüzeylerinde uygulanabilir.

Kullanım Şekli:

Direkt olarak yeni boyalı veya eski boya yüzeylerinde uygulanabilir. Uygulama el veya makine ile yapılır. El ile yapılan uygulamada yüzeye sürülen pasta temiz ve yumuşak bir bezle uygulanır ve kurumadan sonra parlatma işlemine geçilir. Gerekirse yıkama ile atıklar temizlendikten sonra üzerine silikonlu veya teflonlu polish uygulanabilir.

► Polycar®Fine Polish Paste

Product Description:

It is successfully applied in the removal of paint dust formed after paint spraying, removal of traffic pollution on the paint surface and cleaning processes, removal of fine sanding scratches and polishing processes. It does not require washing after application. It does not accumulate on the machine paste base, gives excellent gloss, does not contain silicone, can be applied on all kinds of acrylic, cellulosic, synthetic paint surfaces.

Product Usage:

It can be applied directly on new or old painted surfaces. Application is made by hand or with machine. When applied by hand, the paste is applied to the surface with a clean and soft cloth and polishing is performed after drying. If necessary, silicone or Teflon polish can be applied after the waste is removed by washing.

Net Filling	Pcs per Box	Boxes per Pallet
200 g (Tube)	12 Pcs	200 Boxes
450 g	12 Pcs	96 Boxes
1000 g (Plastic Package)	6 Pcs	90 Boxes
1000 g (Metal Package)	6 Pcs	128 Boxes
Color : White		HS Code: 3405.30.00.00.00



Applicable by hand



Applicable with machine
1200-1600 rpm



See data sheet



Thin with water



Avoid frozen



Avoid sunlight



Use Masking Equipment



Tightly closed



Harmful

▷ bakım grubu car care product group

W5420



Polycar® Likit Teflonlu Cila (Silikonsuz)

Silicone Free Liquid Polish with Teflon



▷ Polycar® Likit Teflonlu Cila (Silikonsuz)

Ürün Açıklaması:

Yeni veya zamanla parlaklığını kaybetmiş her cins boya yüzeyinde kullanılabilen silikon içermeyen parlatici teflon+polyethylen kaplama özelliği ile koruma yapan özel amaçlı ciladır. Güneşin soldurucu Ultraviyole (UV) ışın etkilerine karşı boyanın renk atmasını önler. Aynı zamanda asit yağmurları ve kuş pisliklerine karşı boyayı koruyarak çizilmelere ve atmosfer şartlarına karşı direnç sağlar. Boya yüzeyinde trafik kirliliğinin giderilmesi ve temizleme işlemlerinde kullanılabilir. Makina polish tabanında toplama yapmaz. Rahat uygulanabilir. Plastik parçalarda leke bırakmaz. Hologram oluşturmaz.

Kullanım Şekli:

Polish uygulanacak yüzey iyice yıkanmalı ve kurutulmalıdır. Ürün temiz ve yumuşak bir bezle veya polisaj süngeri ile yüzeye homojen şekilde sürülmeli ve temiz, kuru ve yumuşak polisaj (mikro fiber) bezi ile yüzey parlatılmalıdır. Güneş altında uygulanmamalıdır.

▷ Polycar® Silicone Free Liquid Polish with Teflon

Product Description:

It is a silicone-free polish that can be used on all types of paint surfaces which have lost their gloss over time or can be used on all types of paint surfaces and it is a special purpose polish that protects the surface thanks to its Teflon+ polyethylene coating feature. It prevents discoloration of the paint against the fading Ultraviolet (UV) ray effects of the sun. It also protects the paint against acid rain and bird droppings, providing resistance to scratches and atmospheric conditions. It can be used to prevent traffic pollution on the paint surface and for cleaning processes. The machine does not cause accumulation on the polish base. It is easy to apply. It does not leave stains on plastic parts. It does not cause a hologram.

Product Usage:

The surface to be polished should be thoroughly washed and dried. Apply the product homogeneously on the surface with a clean and soft cloth or polishing sponge and polish the surface with a clean, dry and soft polishing (micro fiber) cloth. It should not be applied under the sun.

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	176 Boxes
1 Lt	12 Pcs	55 Boxes

Color : White HS Code: 3405.30.00.00.00



Applicable by hand



Applicable with machine



See data sheet



Avoid frozen



Avoid sunlight



Use Masking Equipment



Tightly closed



Harmful

08

► bakım grubu car care product group

Polycar® Power Polish Silikonlu Oto Cilası Silicone Liquid Auto Polish



W5520

► Polycar® Power Polish Silikonlu Oto Cilası

Ürün Açıklaması:

Yüzey üzerinde ince parlak bir film tabakası oluşturarak çizilme ve darbelere karşı mukavemeti arttıran silikon içeren parlaticı bir üründür. Yeni veya zamanla parlaklığını kaybetmiş her cins boya üzerine direkt olarak veya pasta işleminden sonra uygulanır. Leke ve kirleri yok eder, toz tutmaz, her türlü dış etkenlere karşı boyayı korur.

Kullanım Şekli:

Polish uygulanacak yüzey iyice yıkanmalı ve kurutulmalıdır. Kutu iyice çalkalandıktan sonra yumuşak temiz bir bezle polish küçük bir alana sürülmeli. Cila tabakası tamamen kurumadan temiz kuru bir bezle parlatma işlemine geçilmeli. Aşırı sıcak hava koşullarında ve güneş altında polish uygulamasından kaçınılmalıdır. Parlatma işlemi bitince kutu iyice kapatılmalı ateşten uzak serin bir yerde muhafaza edilmelidir.

► Polycar Power Polish® Silicone Liquid Auto Polish

Product Description:

It is a silicone-containing polishing product that increases resistance against scratches and impacts by forming a thin glossy film layer on the surface. It is applied directly on all types of paint that are new or have lost their gloss over time or after the paste process. It removes stains and dirt, prevents dust and protects the paint against all kinds of external factors.

Product Usage:

The surface to be polished should be thoroughly washed and dried. After thoroughly shaking, apply the polish to a small area using a soft clean cloth. Polishing should be performed with a clean dry cloth before the polish layer is completely dry. Avoid applying polish in extremely hot weather conditions and under the sun. When the polishing process is finished, the box should be closed well and kept in a cool place away from fire.

Net Filling	Pcs per Box	Boxes per Pallet
0,25 Lt	12 Pcs	176 Boxes
1 Lt	12 Pcs	55 Boxes
Color : Turquoise		HS Code: 3405.30.00.00.00



Applicable by
hand



Applicable
with machine



See data sheet



Avoid frozen



Avoid sunlight



Use Masking
Equipment



Tightly closed



Harmful

▷ bakım grubu car care product group

W3220



Polycar® Universal Likit Pasta - Medium Cut INDUSTRY

Universal Liquid
Compound - Medium Cut



▷ Polycar® Universal Likit Pasta - Medium Cut

Ürün Açıklaması:

Bütün boya yüzeylerinde (MS, HS, Seramik kaplamalı, yeni boyanmış veya kür olmuş) uygulanabilen yüksek kaliteli bir likit pastadır. P1500-2500 ve daha ince zımpara çiziklerini-hareleri kolaylıkla yüzeyden alıp tek kademede mükemmel parlaklık sağlar. Yüzeyde kurumadan uzun süreli çalışılabilir. Plastik yüzeylerde leke bırakmaz. Yıkınması ve silinmesi kolaydır. Hologram oluşturmaz, silikon içermez. Su bazlı olup düşük VOC değerlidir. Pasta süngerli veya keçe (post) kullanılarak uygulama yapılabilir.

Kullanım Şekli:

Pasta uygulanacak yüzey P1500-2500 ve daha ince zımpara ile düzeltildikten sonra kutuda iyice çalkalanmış Universal Likit Pasta, sünger veya post tabanına, veya uygulama yüzeyine küçük bir miktarda sürülüp, yüzey hafifçe su ile ıslatıldıktan sonra 1500-2500 devir/dakika hız ile dönen pasta makinası ile yüzeye uygulanabilir. Yüzeyin performansına göre işlem tekrarlanabilir.

İşlem sırasında yüzeyin kurumaması için bir sprey yardımı ile temiz su uygulanması tavsiye edilir. Pasta işlemi sonrasında istenirse extra parlaklık için Polycar Power Polish/ Teflonlu Polish ile yüzey parlatılır.

▷ Polycar® Universal Liquid Compound - Medium Cut

Product Description:


It is a high quality liquid compound that can be applied on all paint surfaces (MS, HS, Ceramic coated, freshly painted or cured). It easily removes P1500-2500 and finer sanding scratches-marks from the surface and provides perfect shine at a single step. It can be applied for a long time without drying on the surface. It does not leave stains on plastic surfaces. Easy to wash and wipe off.

It does not cause holograms and does not contain silicone. It is water-based and has low VOC value. It can be applied using a compound pad or lambs wool.

Product Usage:

After smoothing the surface to be applied with P1500-2500 and finer sandpaper, thoroughly shaken Universal Liquid Paste can be applied to the sponge or lambswool base, or to the application surface in a small amount, and after the surface is slightly wetted with water, it can be applied to the surface with a pasting machine rotating at 1500-2500 rpm. The process can be repeated according to the performance of the surface. It is recommended to apply clean water with a sprayer to prevent the surface from drying out during the process. After the paste process, the surface is polished with Polycar Power Polish / Teflon Polish for extra shine if desired.

Net Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	55 Boxes
Color : White		HS Code: 3209.90.00.00.00

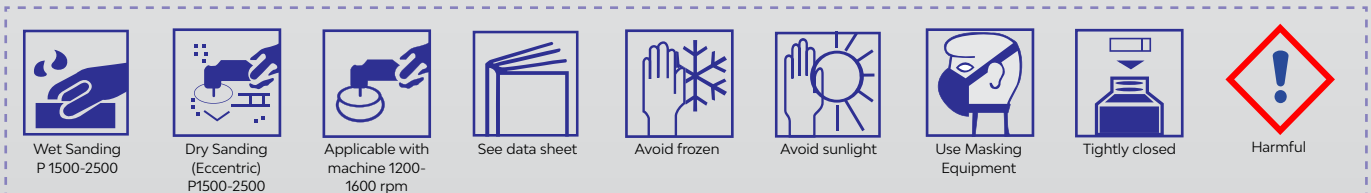

Polycar® Marin Universal Likit Pasta - Fast Cut MARINE

Marine Universal Liquid
Compound - Fast Cut



► Polycar® Marin Universal Likit Pasta - Fast Cut

Ürün Açıklaması:

Polycar Marine Universal Fast-Cut Likit pasta her türlü deniz araçları üzerindeki bütün boya yüzeylerinde uygulanabilen yüksek kaliteli bir pastadır. P1500-P2000 ve daha ince zımpara çiziklerini ve hareleri kolaylıkla yüzeyden alır. Tek kademede mükemmel parlaklık sağlar. Bütün boya yüzeylerinde (MS, HS, düşük sürtünme dirençli özel boyalar, yeni boyanmış veya kür olmuş) kolaylıkla uygulanabilir. Yüzeyde kurumadan uzun süreli çalışılabilir. Plastik, cam ve pileksiglas yüzeylerde leke bırakmaz, yıkanması ve silinmesi kolaydır. Hologram oluşturmaz. Silikon içermez. Su bazlıdır, düşük VOC değerli olup, yanmaya karşı yüksek dirençlidir. Pasta süngeri veya keçe (post) kullanılabilir.

Kullanım Şekli:

Pasta uygulanacak yüzey P 1500-P2000 ve daha ince zımpara ile düzeltildikten sonra kutuda iyice çalkalanmış Marine Universal Likit Pasta, sünger ve post tabanına veya uygulama yüzeyine küçük bir miktarda sürülüp yüzey hafifçe su ile ıslatıldıktan sonra 1200-1600 devir/dakika hız ile dönen pasta makinesi ile yüzeye uygulanabilir. Yüzeyin performansına göre işlem tekrarlanabilir. İşlem sırasında yüzeyin kurumaması için bir sprey yardımı ile temiz su uygulanması tavsiye edilir.

Pasta işlemi sonrasında istenirse extra parlaklık için Polycar Power Polish/Teflonlu Polish ile yüzey parlatılır.



W3211

► Polycar® Marine Universal Liquid Compound - Fast Cut

Product Description:

Polycar® Marine Universal Liquid Compound - Fast Cut is a high quality compound that can be applied on all paint surfaces on all types of marine vehicles. It easily removes P1500-P2000 and finer abrasive scratches and grooves from the surface.

It provides excellent gloss at one step. It can be easily applied on all paint surfaces (MS, HS, special paints with low friction resistance, new painted or cured). It can be applied for a long time without drying on the surface. It does not leave stains on plastic, glass and plexiglass surfaces and is easy to wash and wipe off. It does not cause holograms. It does not contain silicone. It is water-based, has a low VOC value and highly resistant to combustion. Compound pad or lambswool is used as polishing tool.

Product Usage:

After smoothing the surface to be applied with P-1500-P2000 and fine sandpaper, Marine Universal Liquid Compound, which is well shaken, can be applied to the sponge and lambswool or the application surface in a small amount and after the surface is slightly wetted with water, it can be applied to the surface with a pasting machine rotating at a speed of 1200-1600 rpm.

Net Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	55 Boxes
Color : White		HS Code: 3209.90.00.00.00



Wet Sanding:
P1500-2000



Dry Sanding
(Eccentric):
P1500-2000



Applicable with
machine
1200-1600 rpm



See data sheet



Avoid frozen



Avoid sunlight



Use Masking
Equipment



Tightly closed



Harmful

▷ bakım grubu car care product group

W3212



Polycar® Mobilya Universal Likit Pasta - Fast Cut FURNITURE Universal Liquid Compound - Fast Cut



▷ Polycar® Mobilya Universal Likit Pasta - Fast Cut

Ürün Açıklaması:

Polycar Mobilya Universal Fast Cut Likit Pasta bütün ahşap kaplama boya yüzeylerinde (MS, Poliüretan, akrilik, yeni boyanmış veya kür olmuş) ayrıca metalize yüzeylerde (galvaniz kaplama, alüminyum, CTP vb.) uygulanabilen yüksek kaliteli bir pastadır. P1200-P2000 ve daha ince zımpara çiziklerini ve hareleri kolaylıkla yüzeyden alır. Tek kademede mükemmel parlaklık sağlar. Ahşap kaplama yüzeylerde uygulama sırasında yüzeyde işlem bitene kadar yüzey kayganlığını sağlayan özel içeriği sayesinde matlaşma ve performans kaybı olmadan mükemmel son kat kalıcı boya parlaklığı sağlar. Yüzeyde kurumadan uzun süreli çalışılabilir. Plastik, cam ve pileks glas yüzeylerde leke bırakmaz, yıkanması ve silinmesi kolaydır. Hologram oluşturmaz. Silikon içermez. Su bazlıdır, düşük VOC değerlidir. Pasta sünger- keçe(post) veya tamburlu pasta makinelerinde kullanılmaya uygundur.

Kullanım Şekli:

Pasta uygulanacak yüzey P1200-P2000 veya daha ince zımpara ile düzeltildikten sonra kutuda iyice çalkalanmış Mobilya Universal Likit Pasta, sünger ve post tabanına veya uygulama yüzeyine küçük bir miktarda sürülüp yüzey hafifçe su ile ıslatıldıktan sonra 1200-1600 devir/dakika hız ile dönen pasta makinesi ile yüzeye uygulanabilir. Yüzeyin performansına göre işlem tekrarlanabilir. İşlem sırasında yüzeyin kurumaması için bir sprey yardımı ile temiz su uygulanması tavsiye edilir. Pasta işlemi sonrasında istenirse extra parlaklık için Polycar Power Polish/ Teflonlu Polish ile yüzey parlatılır.

▷ Polycar® Universal Liquid Compound for Furnitures - Fast Cut

Product Description:

Universal Liquid Compound for Furnitures - Fast Cut is a high quality paste that can be applied on all wood coating paint surfaces (MS, Polyurethane, acrylic, freshly painted or cured) as well as on metallized surfaces (galvanized, aluminum, GRP etc.). It easily removes P1200-P2000 and finer abrasive scratches and grooves from the surface. It provides perfect shine in one step. It provides excellent top coat durable shine without dulling and loss of performance thanks to its special content that provides surface lubricity until the end of the process on the surface during application on wood coating surfaces. It can be applied for a long time without drying out on the surface. It does not leave stains on plastic, glass and plexiglass surfaces and is easy to wash and wipe off. It does not cause holograms. It does not contain silicone. It is water-based and has low VOC value. It is suitable for use in pastry sponge-lambwool or drum paste machines.

Product Usage:

After the surface to be applied with paste is sanded with P1200-P2000 or fine sandpaper, Universal Liquid Compound for Furnitures, which is shaken well, can be applied to the sponge and lambwool or application surface in a small amount and after the surface is slightly wetted with water, it can be applied to the surface with a rotating paste machine with a speed of 1200-1600 rpm. The process can be repeated according to the performance of the surface. It is recommended to apply water with the spray to prevent the surface from drying out during the process. After the paste process, the surface can be polished with Polycar Power Polish / Teflon Polish for extra shine if desired.

Net Filling	Pcs per Box	Boxes per Pallet
1000 g	12 Pcs	55 Boxes
Color : White		HS Code: 3209.90.00.00.00



Wet Sanding:
P1200-2000



Dry Sanding
(Eccentric):
P1200-2000



Applicable with
machine 1200-
1600 rpm



See data sheet



Avoid frozen



Avoid sunlight



Use Masking
Equipment



Tightly closed



Harmful

09

► aksesuar grubu accessory group



POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

► aksesuar grubu accessory group

PU 2645



Politek Pu Mastik Politek Pu Sealant



► Politek Pu Mastik

ÜRÜN ÖZELLİKLERİ

- Atmosferik nemle kirlenen yüksek dayanım kabiliyetli tek bileşenli yalıtım ve yapıştırma malzemesi
- *Çıplak ve boyalı yüzeylere çok iyi yapışır.
- *Korozyonu önler,hacmini kaybetmez.
- *Sıcak ve soğuga dayanıklı olup esneme ve sarkma yapmaz.
- *Sürekli elastik kalır.
- *Çekimi kolay olup pürüzsüz bir yüzey oluşturur.
- *Üzerine her türlü boya uygulaması yapılabilir.

UYGULAMA ALANLARI

- *Motorlu ve motorsuz araçların ek yerlerinde
- *Deniz araçlarında
- *İnşaatlarda derz aralarında ve çatıların ek yerlerinde
- *Havalandırma kanalları,olukları,konteynerler,karavanlar vb uygulamalarda
- *Çelik,alüminyum,kurşun,bakır,cam,ağaç ,granit,mermer, yapay taş,corian ve kompozit malzemeler
- aynalar,seramik,PVC ve çeşitli plastiklerden yapılmış levhalarda mükemmel yapışma ve izolasyon sağlar.

KULLANIM ÖZELLİKLERİ

- *Uygulama alanı kuru,temiz,toz ve yağdan arındırılmış olmalıdır.
- *Kontraktürün ucu uygulanacak yüzeye göre çapı ayarlanarak kesilir ve kartuş tabancası vasıtası ile mastik yüzeye çekilir.
- *Kuru ve iyi havalandırılan bir ortamda kapalı ambalajında 5-25°C arasında saklanmalıdır.
- *Stoklama alanında yüksek sıcaklıklar ve yüksek bağıl nem olmamasına dikkat edilmelidir.
- *Ürün ömrü üretim tarihinden itibaren 12 aydır.(Ambalaj üzerine basılıdır)
- *Çocukların ve evcil hayvanların erişemeyeceği yerde saklayınız.

► Politek Pu Sealant

PRODUCT PROPERTIES

- It's one component, for isolation and sealing product. It has high strenght.
- It cures with atmospheric humidity.
- Very well sealing to bare and painted surfaces.
- It prevents corrosion, does not lose volume.
- Resistant to cold and heat, no stretching, no sagging.
- It's always flexible.
- Easy to apply, creates smooth surface.
- All kinds of paints can be applied on it.

USING AREA

- It provides excellent adhesion and isolation to all of the following materials;
- Joints in motor and motorless vehicles,
- Marine vehicles,
- Joints in roof, joint groove in constructions,
- Ventilating duct and slot, containers, caravans applications etc.
- Steel, aluminium, lead, copper, glass, wood, granite, marble, cast stone,
- corian and composite material, mirror, ceramic, PVC and plastic plate.

USING PROPERTIES

- *Application area should be dry, clean, free of dust and grease.
- *Cut the tip of the contracture according to the diameter of the surface to be applied, use cartridge gun.
- *Should be stored closed package, between 5-25°C, at dry and well-ventilation area.
- *Should not be high temperature and high relative humidity at storage area.
- *Life is 12 months from date of production. (Written on package)
- *Should be stored out of reach of children and pets.

Net Filling	Pcs per Box	Boxes per Pallet
280 ml	25 Pcs	100 Boxes
Color : Black,White,Gray		HS CODE:3214.90.00.00.19

Politek Pasta/ Cila Süngeri

Applicator Compound Foam



► Politek Pasta/Cila Süngeri

Kullanım Önerileri

Pasta ve cila uygulaması yapmak için havalı veya elektrikli pasta makineleri ile beraber kullanılır.

0-2500 (maksimum) devir / dakika aralığında ve ilk kullanımda süngerin nemlendirilerek kullanılması önerilir.

Uygulama yapıldığında yüzeydeki boya akıntıları ve zımpara çiziklerini alarak mükemmel bir sonuç sağlar.

Sünger çap : 140mm

Sünger kalınlığı : 45mm

Makina Bağlantısı : M14mm

► Applicator Compound Foam

INSTRUCTIONS

Used with air or electrical polishing machines for paste and polish application.

Recommended to be used between 0-2500 turn per minute and to be dampened of the sponges for first usage. Ensures a perfect appearance by removing paint streams and sand scratches when it is applied.

Sponge diameter : 140mm

Sponge thickness : 45mm

Machine connection : M14mm

Dimension	Pcs per Box	Boxes per Pallet
140x 45 mm	36 Pcs	21 Boxes
Color : White, Orange,Black,Blue,Yellow,Cherry,Wavy Black,Black/Orange		HS CODE:3926.90.97.90.18

► aksesuar grubu accessory group

MB0001



Politek Mumlu Bez Politek Tack Cloth



► Politek Mumlu Bez

Boya öncesi yüzeyde mükemmel temizlik sağlar.

- Boyanın zemine iyi yapışmasını sağlar.
- Boyanacak yüzeyde kendinden yapışkanlık bırakmaz.
- Organik dokulu ve %100 saf pamuk ipliğinden üretilmiştir.
- Susuz ve yumuşak temizleme sağlar.
- Kir ve toz almak için etkili, en küçük yüzeylere kadar güzel temizleme.
- Boya işlemlerinde astar ve basecoat boya üzerindeki tozları iz bırakmadan alır.
- Cilde zarar vermez, kurumaz ve bozulmaz.

► Politek Tack Cloth

- Provides perfectly clean surfaces before painting
- Provides good surface adherence of paint
- Leaves no adhesion on the surface
- Its produced from %100 cotton row materials
- Provides waterless and soft cleaning
- Very e_ective for cleaning dirt and dust, provides excellent cleaning of even the smallest parts
- Its collect dust on the primer and basecoat paints without leaving any damage in paint process
- Does not damage the skin, dry, degradation.

Dimension	Pcs per Box	Boxes per Pallet
30 X 90 cm	100 Pcs	108 Boxes
Color : White, Yellow		HS CODE:6307.10.90.90.00

Politek Maskeleme Bandı

Politek Masking Tape



► Politek Maskeleme Bandı

ÖZELLİKLER

- * 80°C'ye kadar dayanıklıdır.
- * Esnekliği ve iyi yapışkanlık özelliği sayesinde tüm kenar ve köşelerde kolayca uygulanır.
- * 5°C altında saklanması uygun değildir.
- * Fırın kullanımlarında etkili sonuç verir.
- * Doğal kauçukla yapılmıştır.
- * Bant ile su temas etmemeli.

► Politek Masking Tape

FEATURES

- * Resistant up to 80 ° C.
- * " Conforms to contours, irregular surfaces and shapes."
- * Do not storage below 5 °C.
- * It is effective in oven usage.
- * Made with natural rubber.
- * " The tape should not come into contact with water."

Dimension	Pcs per Box	Boxes per Pallet
18mm x 32m	96	84
24mm x 32m	72	84
36mm x 32m	48	84
48mm x 32m	36	84
Color : Brown, Ivory		HS CODE:4811.41.90.90.00

► aksesuar grubu accessory group



Boya Süzgeci Paint Strainer



► Boya Süzgeci

Boyanın boya tabancasına veya boya hazırlama kabına doldurulması esnasında boyanın süzülmesini sağlar
Tek kullanımlıktır.

Su bazlı boyalar için 125 mikron süzgeç tavsiye edilir.
Solvent bazlı boyalar için 190 mikron süzgeç tavsiye edilir.
Koli şeklinde satış yapılmaktadır.

► Paint Strainer

It allows the paint to drain while being added to the paint gun or paint preparation container.

It is for single use.

A 125 Micron strainer is recommended for water-based paints.

A 190 Micron strainer is recommended for solvent based paints.

It is sold in box form.

	Pcs per Box	Boxes per Pallet
	1000 Pcs	60 Boxes
Color : White, White		HS CODE:4823.90.85.99.00

► sertifika certificate

NAVIGA
CERTIFICATION

SERTİFİKA
CERTIFICATE OF REGISTRATION

Bu sertifika aşağıdaki kuruluşa
This certificate has been awarded to the company

POLİTEK

POLİTEK OTO BOYALARI SANAYİ VE TİCARET A.Ş.

**İstanbul Deri Org. San. Bölğ. Nubuk Cad. Yb-7 Özel Parsel No:14
Tuzla, İSTANBUL**

**Bursa Fabrika:Bursa İhtisas Deri Org. San. Bölğ. Badırga Mah. 9.
Sok. No:2 16290 Nilüfer, BURSA**

Uygulanmakta olan Kalite yönetim sisteminin
To certify that the implemented Quality management system complies with

ISO 9001:2015

Standartına uygunluğunu belgelendirmek amacı ile aşağıdaki kapsamda verilmiştir.
For the activities described below

OTO TAMİR BOYASI VE YAN MAMÜLLERİ ÜRETİMİ
MANUFACTURING OF CAR REFINISHING PAINTS AND RELATIVE PRODUCTS.

Sertifika No. / Certificate No.: 1740562
İlk Belgelendirme Tarihi / Initial Certification Date: 29.06.2017
Sertifika Tarihi / Date of Certificate: 27.06.2024
Geçerlilik Tarihi / Validity Date: 28.06.2025
Bitiş Tarihi / Expiry Date: 28.06.2026

İstanbul, 27.06.2024 (Rev.08)

İşbu sertifika, Naviga'nın prosedür, talimatları ve yukarıdaki standart gerekliliklerine ve düzenli olarak yapılacak gözetim denetimlerinin bage ile tamamlanması bağı olarak, yukarıdaki adres ve kapsam dahilinde geçerlidir. Belgelendirme periyodu 3 yıldır.
This certificate is valid for above address(es) and scope upon compliance with Naviga procedure(s), instruction(s) and the above mentioned standard and successful completion of regular surveillance audits. Certificate period 3 years.
Bu sertifikaya geçerliliği, TÜRKAK veritabanına bağlanan ve/veya QR kodu ile veya QR kodu altındaki TRGS sertifika numarası ile www.turkac.org.tr adresinden doğrulanabilir.
The validity of this certificate can be checked through QR code by TURKAK database or TRGS certificate no. under QR code on www.turkac.org.tr webpage.

NAVİGA ULUSLARARASI BELGELENDİRME VE DÜŞÜM HİZMETLERİ LTD. ŞTİ.
Yeniceosun Markazı Mah. 29 Ekim Cad. No:35 Kat:1 Bahçelievler-İSTANBUL
Tel: 0212 482 9454-Fax: 0212 482 9434 www.turkac.org.tr - info@turkac.org.tr

FL 009 001/28 10.03.2017

NAVIGA
CERTIFICATION

SERTİFİKA
CERTIFICATE OF REGISTRATION

Bu sertifika aşağıdaki kuruluşa
This certificate has been awarded to the company

POLİTEK

POLİTEK OTO BOYALARI SANAYİ VE TİCARET A.Ş.

**İstanbul Deri Org. San. Bölğ. Nubuk Cad. Yb-7 Özel Parsel No:14
Tuzla, İSTANBUL**

**Bursa Fabrika:Bursa İhtisas Deri Org. San. Bölğ. Badırga Mah. 9.
Sok. No:2 16290 Nilüfer, BURSA**

Uygulanmakta olan Çevre yönetim sisteminin
To certify that the implemented Environmental management system complies with

ISO 14001:2015

Standartına uygunluğunu belgelendirmek amacı ile aşağıdaki kapsamda verilmiştir.
For the activities described below

OTO TAMİR BOYASI VE YAN MAMÜLLERİ ÜRETİMİ
MANUFACTURING OF CAR REFINISHING PAINTS AND RELATIVE PRODUCTS.

Sertifika No. / Certificate No.: 1743563
İlk Belgelendirme Tarihi / Initial Certification Date: 29.06.2017
Sertifika Tarihi / Date of Certificate: 27.06.2024
Geçerlilik Tarihi / Validity Date: 28.06.2025
Bitiş Tarihi / Expiry Date: 28.06.2026

İstanbul, 27.06.2024 (Rev.08)

İşbu sertifika, Naviga'nın prosedür, talimatları ve yukarıdaki standart gerekliliklerine ve düzenli olarak yapılacak gözetim denetimlerinin bage ile tamamlanması bağı olarak, yukarıdaki adres ve kapsam dahilinde geçerlidir. Belgelendirme periyodu 3 yıldır.
This certificate is valid for above address(es) and scope upon compliance with Naviga procedure(s), instruction(s) and the above mentioned standard and successful completion of regular surveillance audits. Certificate period 3 years.
Bu sertifikaya geçerliliği, TÜRKAK veritabanına bağlanan ve/veya QR kodu ile veya QR kodu altındaki TRGS sertifika numarası ile www.turkac.org.tr adresinden doğrulanabilir.
The validity of this certificate can be checked through QR code by TURKAK database or TRGS certificate no. under QR code on www.turkac.org.tr webpage.

NAVİGA ULUSLARARASI BELGELENDİRME VE DÜŞÜM HİZMETLERİ LTD. ŞTİ.
Yeniceosun Markazı Mah. 29 Ekim Cad. No:35 Kat:1 Bahçelievler-İSTANBUL
Tel: 0212 482 9454-Fax: 0212 482 9434 www.turkac.org.tr - info@turkac.org.tr

FL 009 001/28 10.03.2017

NAVIGA
CERTIFICATION

SERTİFİKA
CERTIFICATE OF REGISTRATION

Bu sertifika aşağıdaki kuruluşa
This certificate has been awarded to the company

POLİTEK

POLİTEK OTO BOYALARI SANAYİ VE TİCARET A.Ş.

**İstanbul Deri Org. San. Bölğ. Nubuk Cad. Yb-7 Özel Parsel No:14
Tuzla, İSTANBUL**

**Bursa Fabrika:Bursa İhtisas Deri Org. San. Bölğ. Badırga Mah. 9.
Sok. No:2 16290 Nilüfer, BURSA**

Uygulanmakta olan İş Sağlığı ve Güvenliği yönetim sisteminin
To certify that the implemented Occupational Health And Safety management system complies with

ISO 45001:2018

Standartına uygunluğunu belgelendirmek amacı ile aşağıdaki kapsamda verilmiştir.
For the activities described below

OTO TAMİR BOYASI VE YAN MAMÜLLERİ ÜRETİMİ
MANUFACTURING OF CAR REFINISHING PAINTS AND RELATIVE PRODUCTS.


Sertifika No. / Certificate No.: 1744564
İlk Belgelendirme Tarihi / Initial Certification Date: 29.06.2017
Sertifika Tarihi / Date of Certificate: 27.06.2024
Geçerlilik Tarihi / Validity Date: 28.06.2025
Bitiş Tarihi / Expiry Date: 28.06.2026

İstanbul, 27.06.2024 (Rev.07)

İşbu sertifika, Naviga'nın prosedür, talimatları ve yukarıdaki standart gerekliliklerine ve düzenli olarak yapılacak gözetim denetimlerinin bage ile tamamlanması bağı olarak, yukarıdaki adres ve kapsam dahilinde geçerlidir. Belgelendirme periyodu 3 yıldır.
This certificate is valid for above address(es) and scope upon compliance with Naviga procedure(s), instruction(s) and the above mentioned standard and successful completion of regular surveillance audits. Certificate period 3 years.


NAVİGA ULUSLARARASI BELGELENDİRME VE DÜŞÜM HİZMETLERİ LTD. ŞTİ.
Yeniceosun Markazı Mah. 29 Ekim Cad. No:35 Kat:1 Bahçelievler-İSTANBUL
Tel: 0212 482 9454-Fax: 0212 482 9434 www.turkac.org.tr - info@turkac.org.tr


FL 009 001/28 10.03.2017

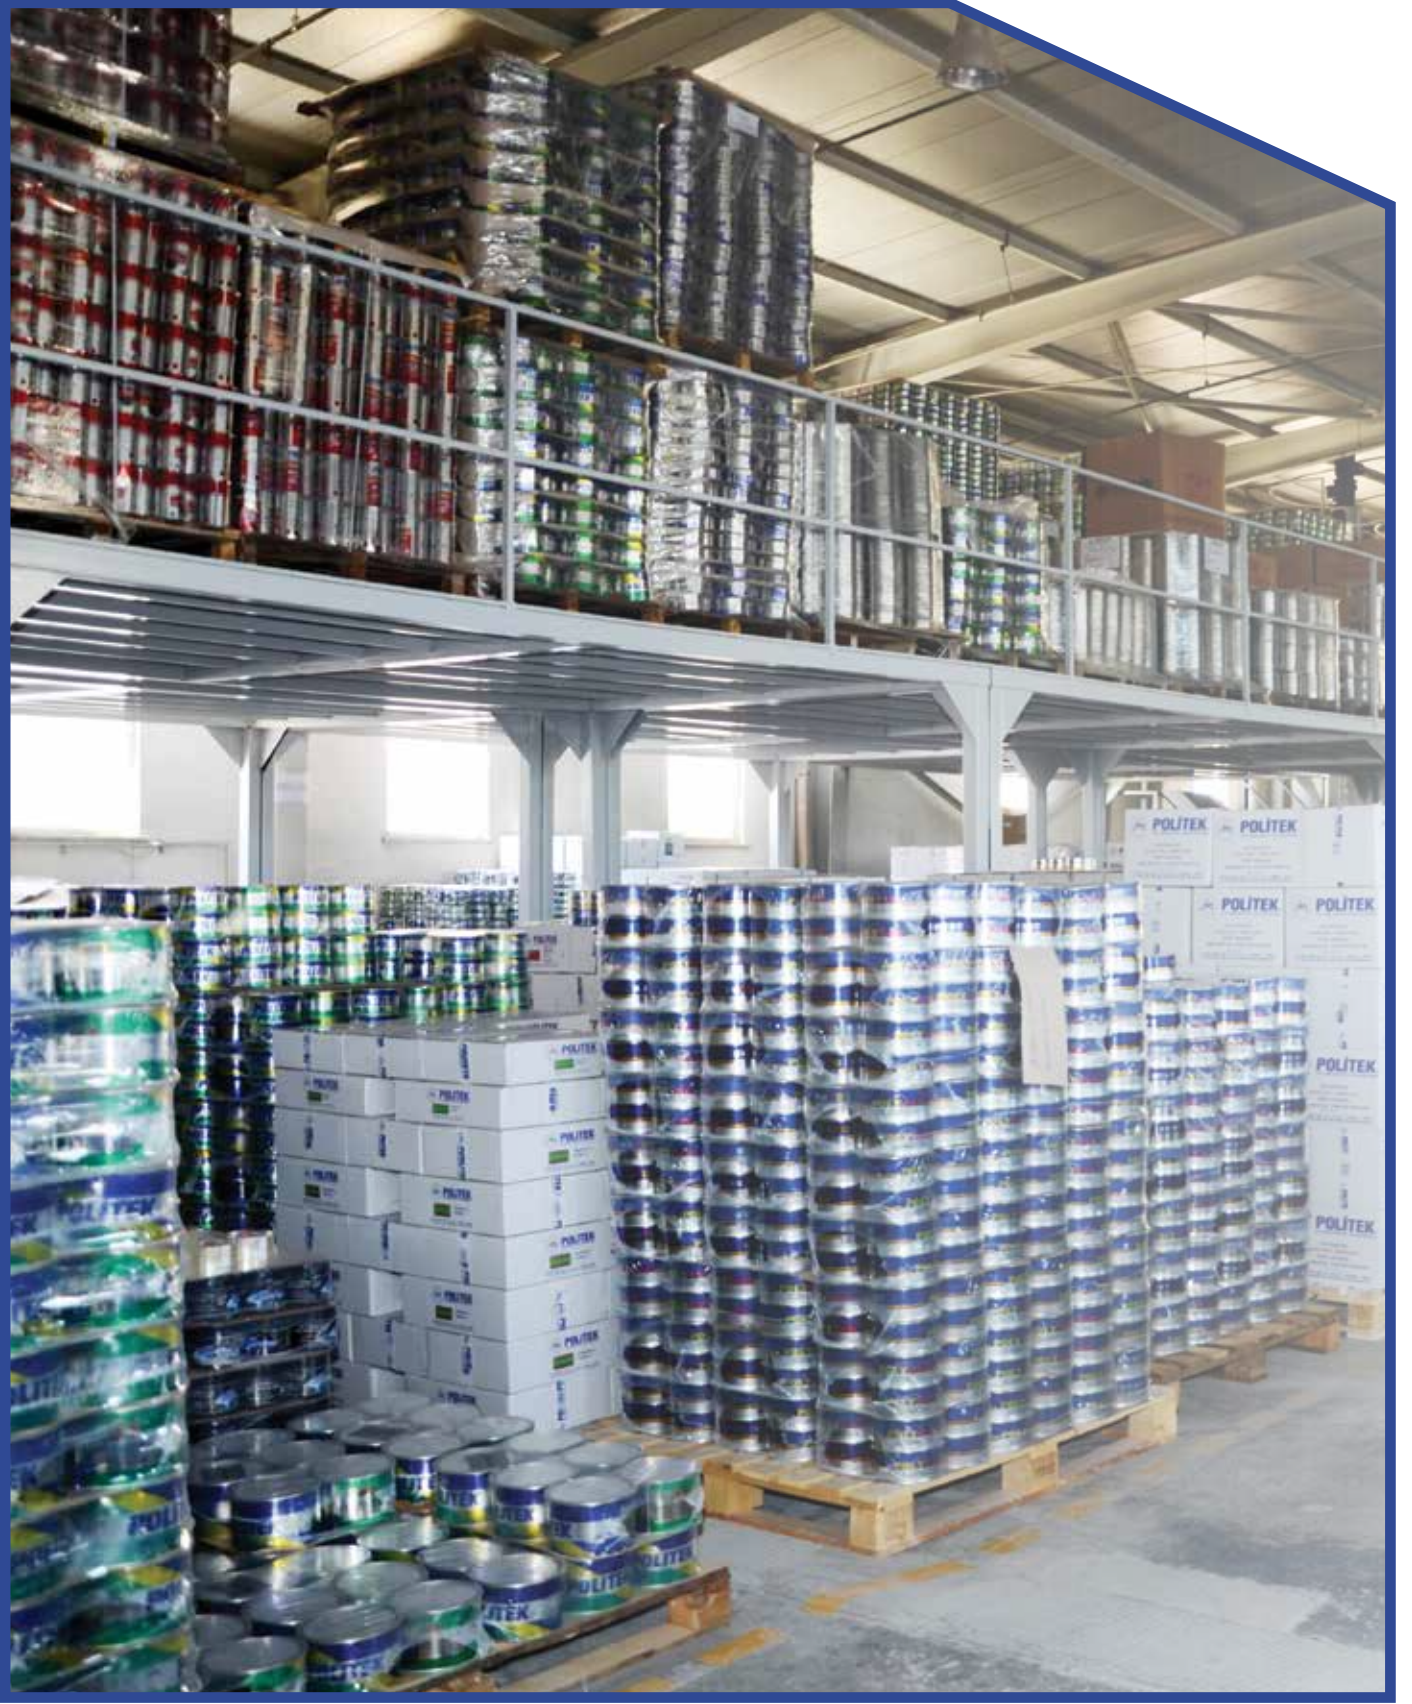

POLITEK
OTO TAMİR BOYALARI / CAR REFINISHINGS

www.icmpolitek.com.tr

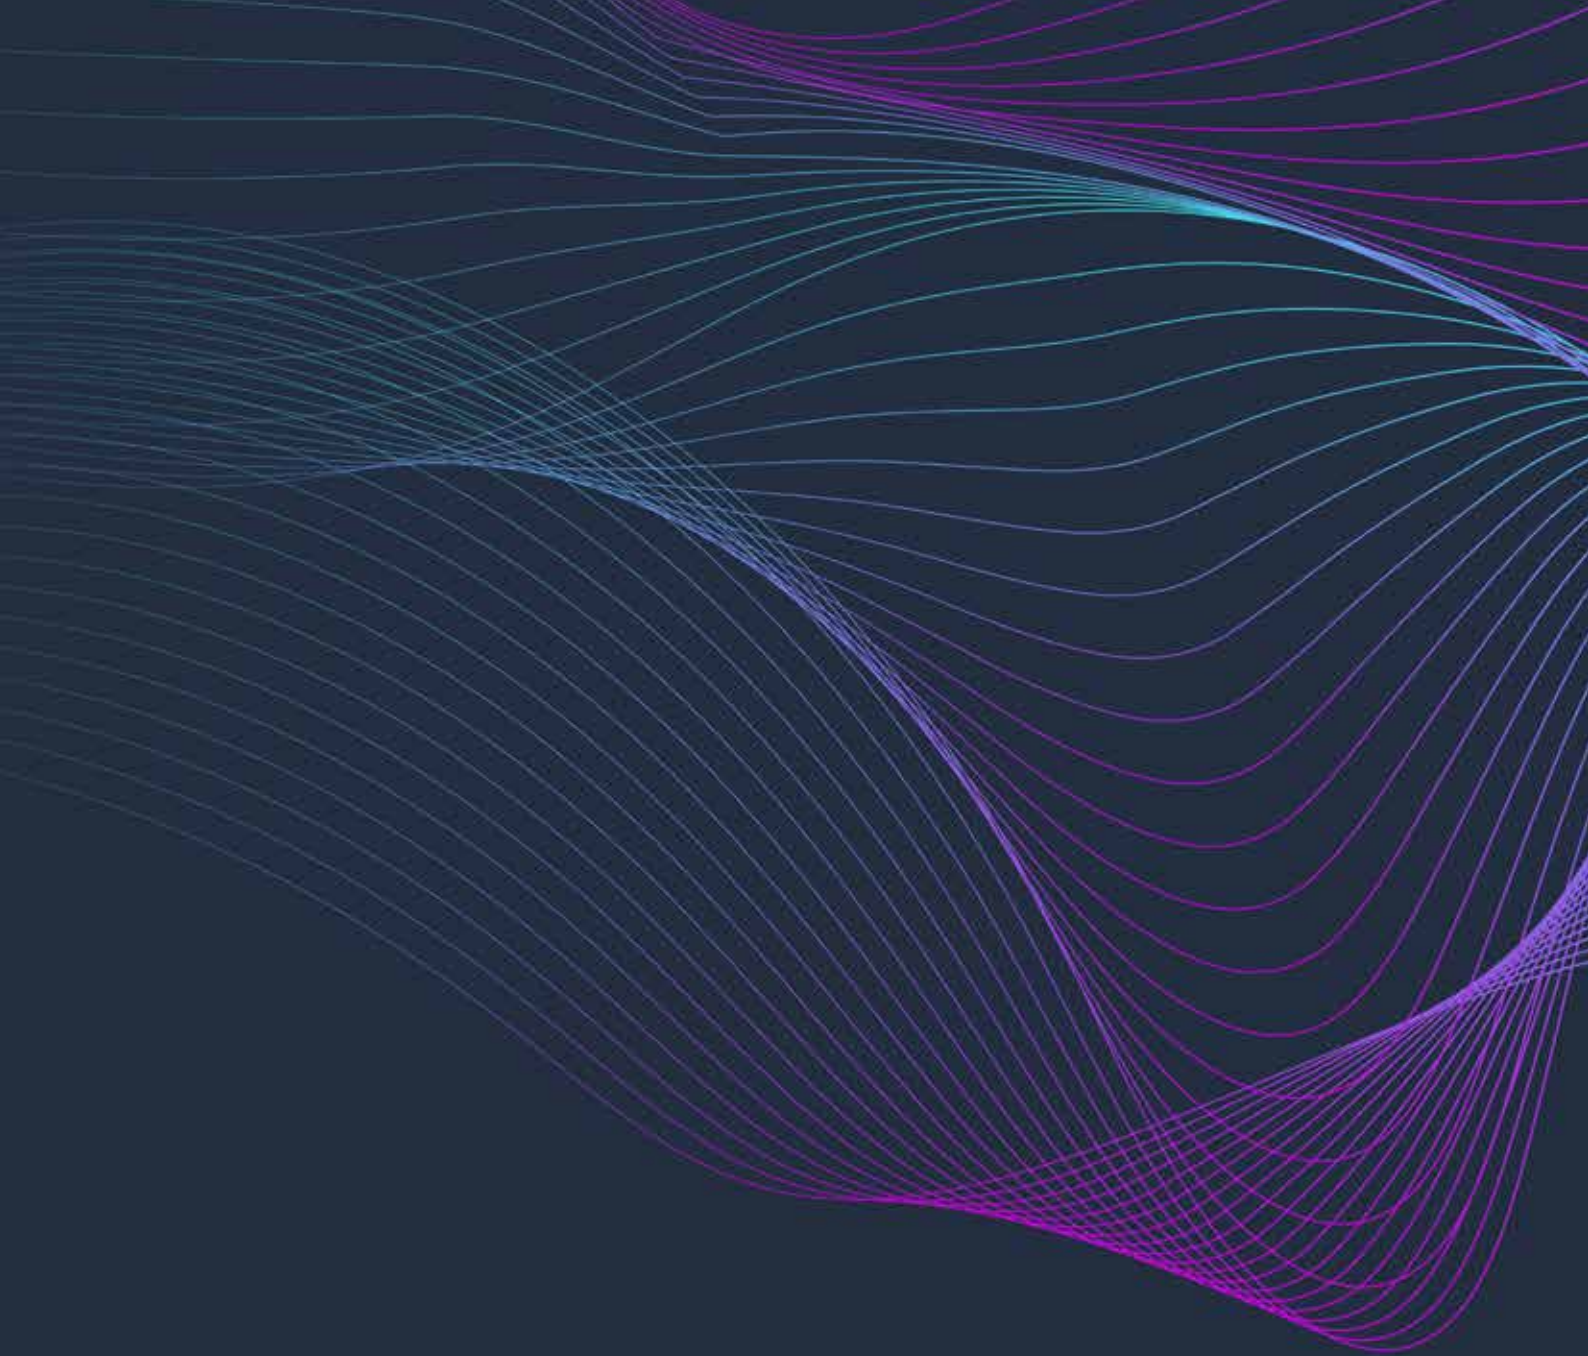

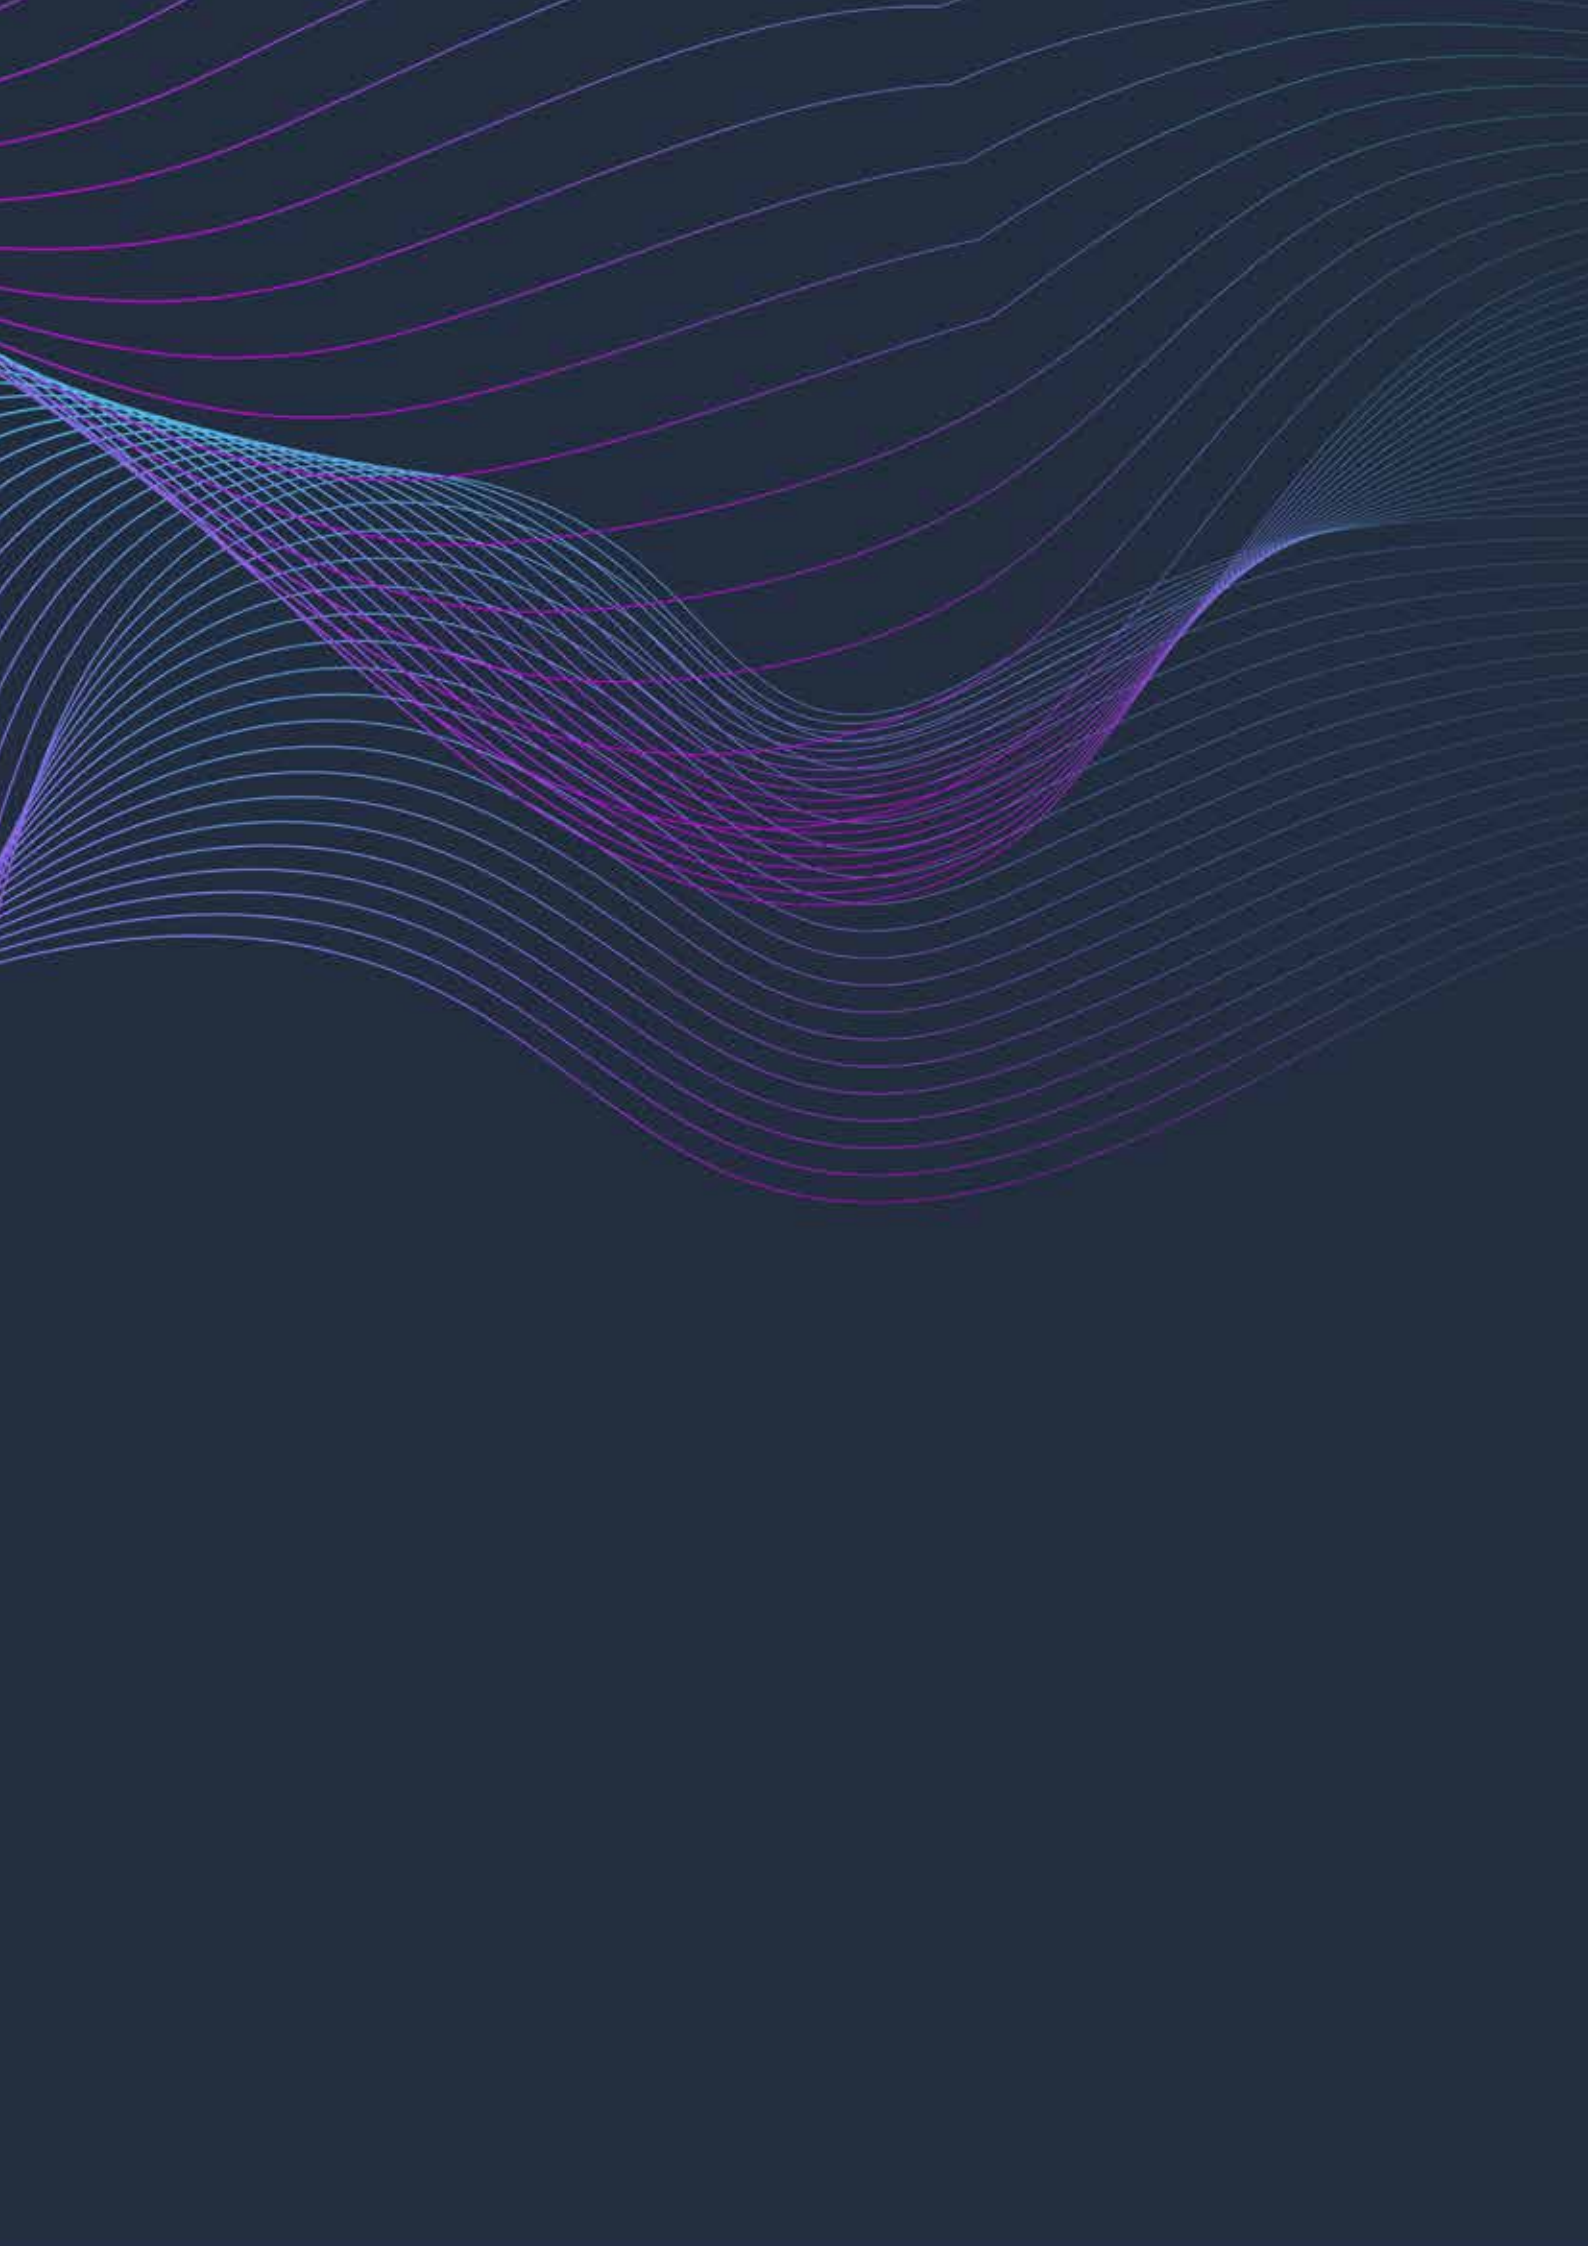

POLITEK®

OTO TAMİR BOYALARI / CAR REFINISHINGS



POLITEK OTO BOYALARI SANAYİ ve TİCARET A.Ş.

Head Office / Istanbul Factory: Deri OSB Mah. Nubuk Cad. İst. Deri OSB Sitesi No:14 Tuzla / İSTANBUL - TURKEY

Tel: +90 216 591 05 55

Bursa Factory: Bursa İhtisas Deri Org. San. Böl. Badırğa Mah. 16.Sk. No:2 D.1 16290 Nilüfer / BURSA - TURKEY

Tel: +90 224 487 01 70

Yönetim Kurulu Başkanı
Chairman of the Board

İhracat Müdürü
Export Department

Teknik Satış ve Pazarlama Müdürü
Technical Sales and Marketing Manager

Müşteri Temsilcisi
Customer Representative

Marmara Bölge Satış Müdürlüğü
Marmara Regional Sales Supervisor

Ege & Akdeniz Bölgesi Satış Müdürlüğü
Aegean & Mediterranean Regional Sales Manager

İç Anadolu ve Karadeniz Bölge Satış Müdürlüğü
Central Anatolia and Black Sea Regional Sales Manager

Doğu & Güneydoğu Anadolu Bölgesi Satış Müdürlüğü
Eastern & Southeastern Anatolia Regional Sales Manager

İBRAHİM ÇELİK
icelik@icmpolitek.com.tr

ÖMER KUŞ
omerkus@icmpolitek.com.tr / +90 530 930 64 64

LEVENT ERGİN
lergin@icmpolitek.com.tr / +90 545 769 34 16

NEVRİS BÜYÜKBALCI
n.buyukbalci@icmpolitek.com.tr / +90 530 930 44 00

+90 533 690 19 10

+90 543 748 81 14

+90 533 603 06 01

+90 533 689 11 26



www.icmpolitek.com.tr