


PGJ Serisi / PGJ Series



Boru Tip Redüksiyon / Tube Type Reducer




Ürün Kodu Product code	ØD1	ØD2	B	C
PGJ 0604	6	4	39,5	14,0
PGJ 0804	8	4	41,5	14,0
PGJ 0806	8	6	41,8	14,3
PGJ 1006	10	6	46,8	17,3
PGJ 1008	10	8	47,3	17,8
PGJ 1206	12	6	51,8	19,3
PGJ 1208	12	8	52,3	19,8
PGJ 1210	12	10	51,5	19,0

PB-G Serisi / PB-G Series



Orta Bacak TE / Male Branch TE




Ürün Kodu Product code	ØD	G	A	B	E	H
PB04-G01	4	G1/8	5,0	25,0	18,5	14
PB04-G02	4	G1/4	5,8	26,3	18,5	17
PB06-G01	6	G1/8	5,0	25,5	19,3	14
PB06-G02	6	G1/4	5,8	26,8	19,3	17
PB06-G03	6	G3/8	6,8	28,3	19,3	20
PB06-G04	6	G1/2	8,0	29,5	19,3	24
PB08-G01	8	G1/8	5,0	28,45	22,75	14
PB08-G02	8	G1/4	5,8	29,75	22,75	17
PB08-G03	8	G3/8	6,8	31,25	22,75	20
PB08-G04	8	G1/2	8,0	32,45	22,75	24
PB10-G01	10	G1/8	5,0	34,0	27,0	17
PB10-G02	10	G1/4	5,8	34,8	27,0	17
PB10-G03	10	G3/8	6,8	36,3	27,0	20
PB10-G04	10	G1/2	8,0	38,5	27,0	24
PB12-G02	12	G1/4	5,8	36,8	29,6	21
PB12-G03	12	G3/8	6,8	37,8	29,6	21
PB12-G04	12	G1/2	8,0	39,5	29,6	24
PB14-G03	14	G3/8	6,8	39,8	31,7	21
PB14-G04	14	G1/2	8,0	41,5	31,7	24
PB16-G03	16	G3/8	6,8	40,8	33,0	24
PB16-G04	16	G1/2	8,0	42,0	33,0	24

PG Serisi / PG Series



Redüksiyon / Reducer




Ürün Kodu Product code	ØD1	ØD2	B
PG06-04	6	4	33,6
PG08-06	8	6	36,1
PG10-07	10	7	41,8
PG10-08	10	8	41,8
PG12-07	12	7	46,9
PG12-08	12	8	46,9
PG12-10	12	10	47,7
PG14-10	14	10	48,3
PG14-12	14	12	48,3
PG16-10	16	10	48,5
PG16-12	16	12	50,1

PZA Serisi / PZA Series



Kruva / Union Cross

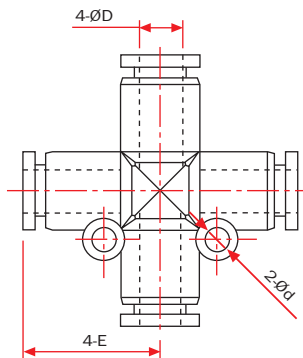

Ürün Kodu Product code	ØD	Ød	E
PZA - 04	4	3,2	17,5
PZA - 06	6	3,2	19,3
PZA - 08	8	3,2	22,75
PZA - 10	10	4,2	27,0
PZA - 12	12	4,3	29,6